spsfilets Adventuring together

Construction Game modules Accessories

f 🗿 in 🔛

www.spsfilets.com

EN

Contents

Kujanak anchoring solutions





e

p.32

Standard

p.50

p.96

Construction of your course





Game modules



Zip-line games

Complementary



games



Accessories

Our know-how



In our workshop we provide you with our know-how, associated with great rigour, allowing us to master every stage of the manufacturing process.



This year, we are proud to welcome Kujanak to the SPS Filets family!

Proud member of








Crimping workshop







The crimping technology gives an unequalled finish and a better life-time.

It also offers high-end elements with more color choices within your aerial rope courses.

Please feel free to contact us !



Type of wood

We supply a "**ready for use**" range of woods which comes from French forests and gives you the choice of wood's variety for your constructions.



- 1 Sustainable chestnut wood (+20 years). EN 350-2 Class 4 Standard according to NF EN 335-2. Chestnut wood is an environmental-friendly alternative against chemically treated wood. It does not need particular treatment/facility at the end of its life.
- 2 Sustainable larch wood (+20 years). EN 350-2 Class 3 Standard according to NF EN 335-2. Larch wood is a natural wood which does not need preservation treatment.
- 3 Autoclave Class 4 wood chemically treated EN 351-1 Class 4 Standard.

Make up your tailor-made obstacles easily

Thanks to our range of possibilities, bring some personality, colors and fun to your courses.

Wood engraving technic on CTBX exterior plywood via digital control.



Digital print on CTBX exterior plywood.







Wood painting. Wood cutting plywood on digital machine.

Please feel free to contact us!

Discover also our alternative materials

New materials for new play modules, let's create together your future circuits with these innovative materials..







Conventional anchoring

Conventional fastening systems exert considerable pressure on the bark, resulting in the death of the tree's upper layers.

The consequences are disastrous: development of fungi, insects, bacteria...

The Kujanak anchoring

The concept of using bolts and anchors enables an installation at a safe distance from the trunk. Thanks to this **eco-friendly method** the tree can continue to grow freely.

A bulge appears around each insert and forms a scar. This contributes to seal the wound and **reinforces the tight fit of the bolt**.



The Kujanak platform

The Kujanak platform is environmentally friendly and 100 % recyclable. Ready-to-assemble delivery.

Douglas fir Structure

Out of sapwood: section 60 x 220, pre-drilled for bolts. *Ref KPF-OCTO*





Inserts and stud bolts kit for your own platforms.



Quick installation in four steps: assembly, positioning, drilling and assembly.



6 logs/rafters Platform

The eco-responsible anchoring system can also be installed on self-built rafter or log platforms. In this case, use 330/400 mm inserts and stud bolts.



330/400 mm inserts and studs kit adaptable to your platforms.






6 rafters version

Zipline landing platform

The purpose of the zipline landing platform is to **make it easier**, **safer** and **more comfortable** for riders to land when arriving on the platform at the end of the zip line. Fits octagonal platforms.

Ref KRECEPTY

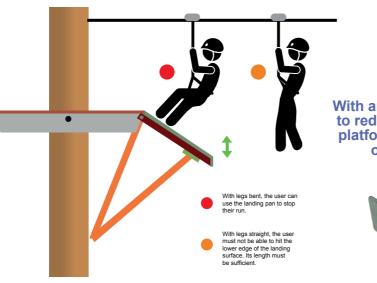



With an articulated joint to reduce strain on the platform and pressure on the trunk.

Hook Ref KCRORTYR-16






Platform prop

The purpose of the prop is to reinforce the platform To improve its stability, in particular **for large platforms** or those that have to withstand unusual loads. **Ref KETAI-PF**



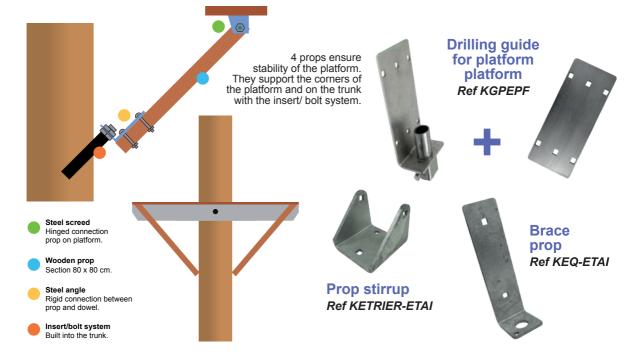

Kujanak anchoring ring

The Kujanak anchoring ring is designed to accommodate a multitude of equipment, such as lifelines, obstacles for treetop adventure parks, nets, zip lines and footbridges, providing a multi-purpose solution for your courses.



S

L

Simple anchoring ring Ref KA

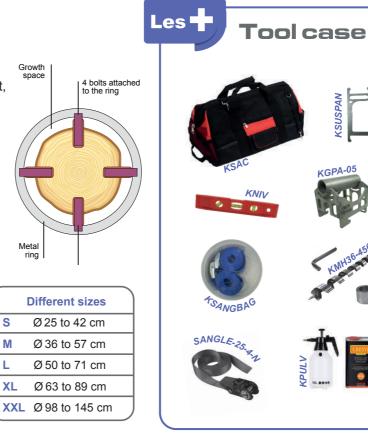




Photo credits - Aventure Parc Wavre.







Photo credits - Arbres et Aventures.

Reinforced anchoring ring

The **reinforced anchorage ring** is designed for specific use in the event of **higher loads** than those normally encountered on a course. For example, in the case of **long zip lines** or **heavy footbridges** such as the **Canopy Tour**.



Jamb for anchoring ring Reinforcement part for heavy loads. Ref KJA



Different sizes					
S	Ø 25 to 42 cm				
М	Ø 36 to 57 cm				
L	Ø 50 to 71 cm				
XL	Ø 63 to 89 cm				
XXL	Ø 98 to 145 cm				

Jamb for anchoring ring

The anchor ring jamb (simple KA or reinforced KAD) is a device used to **transfer the vertical component of a force exerted** on a KA ring by a game or a guy rope. *Ref KJA*





Inserts and bolts kit

Anchoring device designed to be used to suspend light loads such as **loudspeakers**, **lighting**, curtains or to hold equipment such as **support cables** for High rope course games, climbing nets...

Kit 1 insert and 1 stud bolt with 2 nuts, 2 washers and 1 beta pin. *Ref KIG SOLO*



Half-ring anchor

It is perfectly suited to the installation of your games and obstacles, sound carriers, lighting, net curtains, aviaries... Ref KDA

Warning. This anchoring device is not suitable in the following cases:

 for efforts tending to extract it from the trunk.
 to attach individual or collective safety devices. Les Tool Case



Helicoid drill diameter 36 x 400 for installation rings and platforms. Ref KMH36-450




Disinfection sprayer + Crésyl.

Ref KPULV Ref KCRESYL

16

Kujanak accessories

Discover Kujanak innovations that **make construction and maintenance easier and faster**. It means for your building crew shorter construction times. For your company: **cost savings**. For your customers: **durable** and **intuitive** high-performance equipment.



Ref KCLPO



Cable



Bridge plank

Krobois

Accessory for **fastening wood beams to suspension cables** using a simple screw gun. For treetop adventure parks, via ferrata, aerial trails. *Ref KKB*



Crossule


Accessory for attaching suspension ropes (e.g. swings) or footbridges to cables. For treetop adventure parks, via ferrata, aerial trails...

Ref KCS

Vertical access for platform

Galvanized steel cable \emptyset 12 mm, 7 x 19. Custom-made. Thanks to its "cob" system, it allows to stop the user in case of fall before he touches the ground. Standard NF CE 15567-1.

Replaces a stop-fall. Doesn't require maintenance. Improves the fluidity at the start of the course. Complete manufacture of Supply of parts, Your choice your vertical lifeline do-it-yourself Allows to secure Ardicône Kratos shock the access of your Designed to be absorber elevated platforms. positioned on the cable 35 x 220 mm after crimping the barbs. To secure the Ref KLVV vertical lifeline in the event Ardicône of a fall. For vertical lifeline. **Ref KRATOS** Ref KBAR Split Ardicône After crimping **Equidistance barb:** the barbs. children: 40 cm adult: 50 cm. Ref KBARF

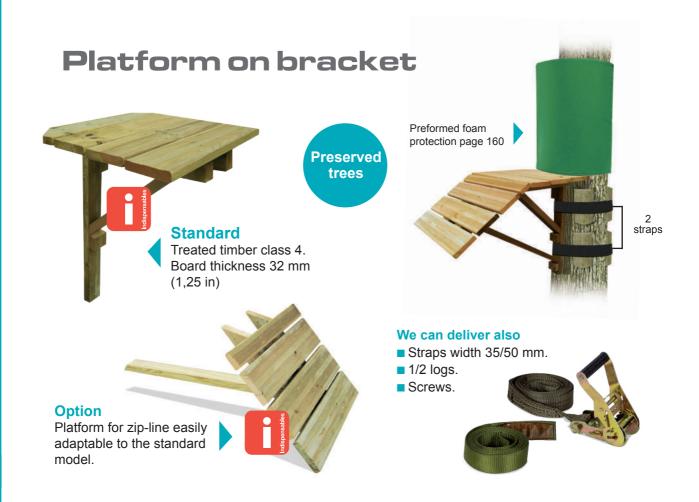

Pimp my platform

Floor shape: apple, pear, cloud or circular plank Ø 800 mm.

Coloured non-slip exterior plywood. Floor thickness

15 mm.

Attached to an autoclave wooden bracket.

Floor colours: black, yellow, grey, green or brown.

NEW



Treated Timber class 4. Composed of:

- Pre-drilled logs Ø 120 mm.
- Half landing deck with grooved boards (rectangular or circular).
- Assembly accessories (threaded rods, nuts, washers, screws...) are included.

Wooden accessories

Wooden wire rope spreader Treated Timber class

Available in two lengths:

■ 750 mm : spacing 658 mm.

1100 mm : spacing 1008 mm.

Wooden wedge Ø100 mm

Treated Timber class 4. With one or two notches to protect trees. Supplied with screws and bolts



Also exists in Ø 125 mm for Sea of nets, Courses without harness, Funbox and installation of long zip lines.

Polypropylene wedges

Plastic wedges (recycled or not) are ideal for building your courses on metal structures. They are weather-resistant and 100% recyclable.




Sleeved sling


Galvanized wire cable \emptyset 12 mm 7 x 19 mm equipped with 1 thimble and large opening at one end + plastic sheath at the other.



Adjustable spacer bar





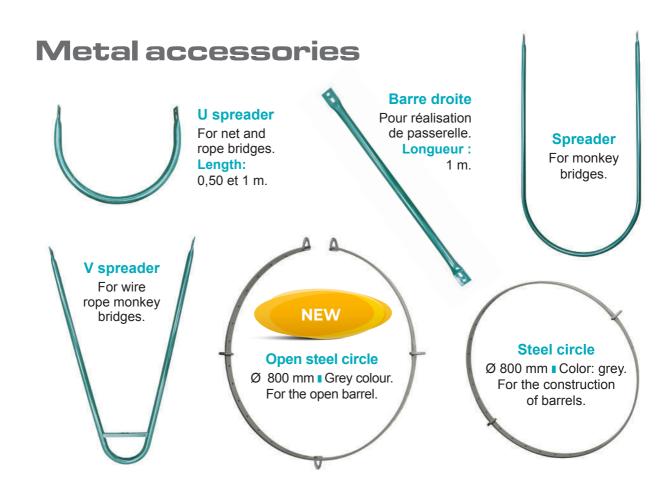

Wire cables and hardware





Ø	Quality	Breaking strength	Construction
10	1960 N/mm2	7233 kg	7 x 19
12	1960 N/mm2	10400 kg	7 x 19

Non rotating steel cable (steel core)

Ø	Quality	Breaking strength	Construction
12	1960 N/mm2	9437 kg	19 x 7



Wire rope tighteners CE Ø 8 I 10 I 12 mm.



High resistance shackle Ø 10 mm to 32 mm.



We also supply



Wire rope tightening bolts Ø 12 mm.

Bulldog wire rope tightener.

Steel sleeve

Ø 13 mm.

Nylon cap nuts

Ø 8 mm for wire rope tightener Ø 10 mm. Ø 10 mm for wire rope tightener Ø 12 mm.

Packaging: 100 or 1000 pieces.

Zinc cap nuts M8 M10 M12.



The game modules are supplied with accessories and packed in small packets.



Thimble Ø 10 to 20 mm.







DELTA link Ø 8 to 14 mm. CE.




Lifting and handling material

Pliable unwinder

Pliable unwinder for cable drum. 100 lm or 500 lm. **Doesn't take up a lot** of space: pliable. moins de place.

Length: 530 mm.
 Width: 561 mm.
 Weight: 12 kg.



Tubular sling

Length: 1 m 1,5 m - 2 m - 2,5 m. Resistance: 2 T. Color green. Possibility of colour brown and black on request.

Wire rope-gripper

Full wire rope-gripper with shackle. Capacity 380 kg for 7 to 15 mm cable or wire rope.



Block and tackle

It has been designed

stowage works in any

technical elds.

1500 kg.

250 kg - 500 kg

for hoisting, traction and



Wire rope gripper in conical shape Load: 2T from 10,50 mm to 14 mm cable.

Wire-strainer

Light, easy to handle and small size. Capacity 600 kg for 7 mm to 15 mm cable.

Portable system to shrink caps and heat-shrinkable sheaths.



Rope reel



The rope

In reels. Color: green, beige, havana, white, black.

Electric iron hot cut



Suspension ropes

We provide the suspension ropes your need to build your obstacles.

Thimble eye and suspension ring at one end and hot-cutting at the other end.


Thimble eye and suspension ring at each end.

Thimble eye and suspension ring crimped on armed rope at one end and threaded rod with washer and nut at the other end.



Moving and steady suspension ropes

Suspension rope made of elastic rope, in a tubular sling. Suspension rope made of polypropylene rope, in a tubular sling.

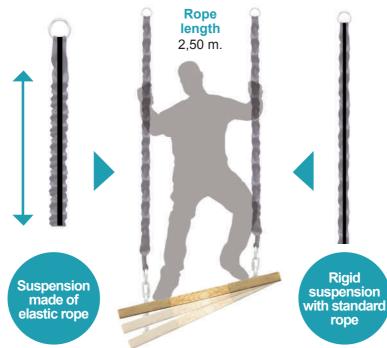



Choice of suspension ropes allows you to get:

- A double steady suspension rope.
- A moving rope on left side and a steady rope on the right side and vice versa.

The climber will discover the fun at the very last moment!



Stairs

Easy and quick assembly

Build your own stairs to get to the platforms. Treated timber class 4. Length 60 cm. Plank Thickness: 27 mm.



Trees are preserved



Ratchet strap to attach the stairs.



32

Game modules



Flying Net


Polypropylene Net, Ø 16 mm, 250 mm square mesh with a ring on each corner.

Standard dimension in stock 3 m* x 1 m. Color black.

Level of difficulty

Climbing net knotted

Polypropylene knotted net Ø 16 mm meshes 250 mm square, with ring at each end.



Climbing net - Color black only Ø 16 mm, 250 mm mesh.

Several dimensions available in stock

2 x 2* - 2 x 3* - 2 x 5* - 3 x 3* 6 x 3* - 4 x 4* - 5 x 5*. * height of the net








Finnish skittle

10 cm Ø log, wood autoclave class 4, beveled at one end. Stenciled on the beveled part. Length 40 cm. Delivered with accessories. Sold in packs of 12 skittles.

Mikado

Class 4 autoclave wooden post, with blue and red paint on the ends, to be installed vertically as an obstacle on a footbridge.

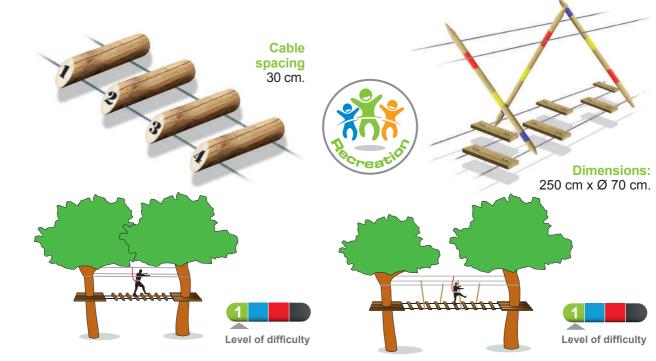



Mini-foot

Level of difficulty

Non-slip CTBX exterior plywood engraved and stained –thickness 15 mm. To be installed on 2 parallel cables and supplied with assembly accessories.


Dimensions: 55 x 25 cm. **Wire cable spacing:** 13 cm.

Tic Tac Toe

X or O in anti-slip CTBX birch plywood, engraved and stained. Thickness 15 mm. Installed on 2 wire cables. Supplied with assembly accessories.

Wire cable spacing: 30 cm.

Level of difficulty



Game modules

36

Domino's footbridge

Planks in form of Domino's, in CTBX birch plywood, non-slip, engraved and stained. Installed on 2 wire cables. Supplied with assembly accessories. Set of six dominos.

Dimensions: 70 cm x 39 cm. **Wire cable spacing:** 30 cm.



Level of difficulty



The Moon

Spacing 80 cm.

Three quarter steel tube to install vertically in staggered rows. Installed on 2 wire cables.

Ø 800 mm.



Game modules



Wooden staircase

Wood plateforme made of autoclave class 4 wood, composed of 2 Ø 100 mm logs and 3 graved planks. Dimensions: 0,50 m x 0,70 m.

Flying square

Made of wooden square rafter 90 x 90 mm, autoclave class 4. Dimensions: 0,60 x 0,60 m. With quick link M6 Large Opening.

Suspension sold separately and to be mounted by yourself.

Wire cable spacing: 50 cm.

38





nnd




Threaded frame

Made of autoclave class 4 board, equipped with knotless 45 mm black polypropylen net. Dimensions: $0,60 \text{ m} \times 1,50 \text{ m}.$

Walking square


Made of 90 x 90 mm wooden square rafter. To be blocked with cable clamps (not supplied). Length : 0,60 m.

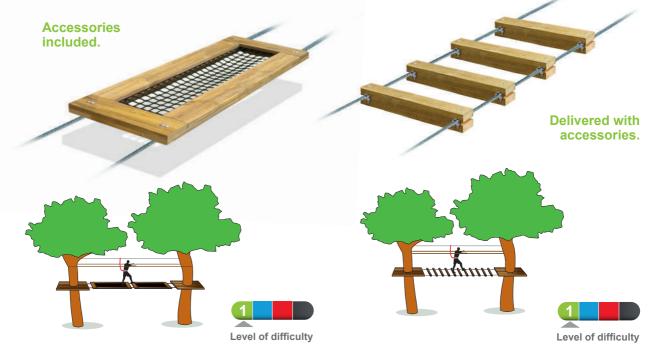




Elastic plank

Made of grooved board, thickness 36 mm, autoclave class 4. With selfassembly accessories. Width: 165 mm. Length: 1m.



Surf climbing

Made of grooved board, autoclave class 4. Dimensions: 1,50 m x 165 mm. Thickness: 36 mm.









Made of Ø 20 mm rope made of dark green polyethylene, equipped with thimble eye and suspension ring at each end and locked with 3 knots with ring. Length: 3 m.





Made of dark green rope Ø 20 mm in polyethylene, equipped with thimble eye and suspension ring at each end, to be attached on a cable. Length: 1 m.

Color green.

Walking rope

Made of dark green rope \emptyset 20 mm in polyethylene, equipped with thimble eye and suspension ring at each end, to be attached on a cable. Length: 1 m.

Spacing: 0,56 m.



0,65 m

1 m

Level of difficulty

Hand

0.56 m

Made of Ø 20 mm dark green polyethylene rope, fitted with thimble eye and suspension ring at

and suspension ring at the top, a knot and a heatshrinkable cap at the bottom.

Length: 0,80 m.





Hammer

Made of wooden square rafter 90 x 90mm, class 4 autoclave. Installed on 2 wire cables. Height 1,80 m. Equipped with a counterweight.


Banana planks for bridge

Non-slip wood, banana form -Length 500 mm. Thickness: 15 mm.





Planks for bridge



Grooved wooden planks for bridge

Width: 145 mm.

145 mm.

Thickness: 27 mm.

Z*I* IIIII.

Length: 500 mm.



Level of difficulty

Including assembly accessories (wire ropes spacing: 400 mm).

Tightrope walker planks

Grooved wooden planks for bridge

Width: 145 mm.

Thickness: 27 mm.

Length: 1 m or 2 m.



Including assembly accessories (wire ropes spacing: 100 mm).






X to walk

Made of 2 autoclave class 4 pine, assembled together in a cross shape. Supplied with assembly accessories.

Snake


Including 2 grooved wooden plank treated class 4, one measuring 1,145 m and the other measuring 2 m.

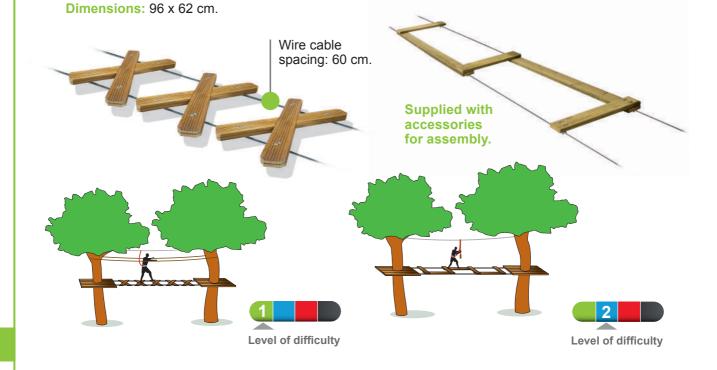




Dominoes

Wood planks treated autoclave class 4, assembled on bearing. Automatic motion.

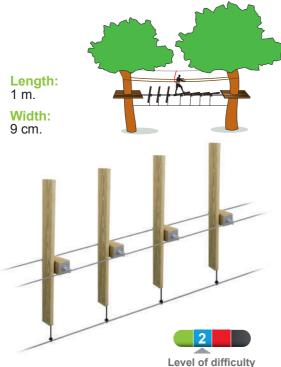

Stilt

Beech wood log Ø 100 mm, treated autoclave class 4. Length 0,66 m. Small walking log Ø 35 mm.



Assembly accessories are included.





Dancing bridge

Set of 3 posts 90 x 90 mm, held together by a Ø 16 mm threaded rod covered by a black Ø 28 mm aluminium tubing. Module is equipped at each end with 6 green polypropylene suspension ropes Ø 16 mm, length 3 m.

Flying door

Made of 90 x 90 mm wooden autoclave class 4 square rafter. Width: 0,80 m. Height: 1,50 m.

4 m



modules Game



Accordion

Made of Ø 60 mm log, autoclave class 4, with 2 holes for the passage of ropes. Length: 0,50 m.







Hanging frame

Made of grooved board, autoclave class 4, with 4 holes for the passage of the ropes. Dimensions: 0,50 x 0,50 m.



Level of difficulty

Suspension sold separately and to be mounted by yourself.

Accordion board

Made of grooved board, autoclave class 4, width 145 mm. Equipped with 2 holes for the passage of ropes. Length: 1,10 m.







Hanging bridge 🔺

Made of grooved board, autoclave class 4, with 4 holes for the passage of the ropes. Dimensions: 0,50 x 0,50 m.



47

modules

Game



The pawn

Hanging foam obstacle equipped with a suspension ring.

Standard color: green.





Foams length: 0,90 m. Total height: 1,50 m. Other colors on request.



Liana

Foam obstacle Ø 10 cm. Each end is closed and equipped with a fixing ring.



Slackline

Cruise Kit

Intended as an introduction for all the family.Can be installed as you wish.

Width 50 mm. This strap gives you increased safety because itcan be installed at knee height, making it safe for beginners.



Ratchet with strap.
 2 tree protection covers.
 Transport bag.

Other Slackline kits are available. To find out more, please don't hesitate to contact us.

The slide


Polyester Tarpaulin

PVC coated.

900 g/m2 with a slit on either side for insertion of the wire rope.


Hemmed with eyelets at top for attachment to platform.

Color: green.





Width: 1 m.

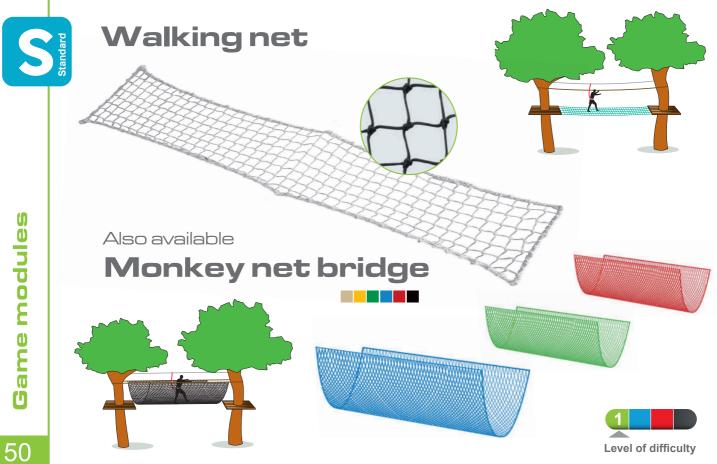


Standard

Braid: polyamide Ø 4,75 mm. Mesh: square, 50 mm knotted. Boltrope: Ø12 mm sewn all around the net. Color: white or black.




Braid: polyamide Ø 5 mm. Mesh: square, 30 mm knotless. Boltrope: Ø 10 mm color white sewn all around the net. Color: beige.



Braid: Polyester 4,50 mm. Mesh: 50 mm knotted square mesh, with perimeter bolt rope Ø12 mm, black. Beige, blue, yellow, red or green masscoloured net.

Braid: Polypropylene 5 mm. Mesh: 45 mm knotless mesh. White perimeter bolt rope Ø 10 mm, sewn around the edge. Net colours: blue, black, green, beige.

Multicolour net: use for indoors only.



Option strop with thimble

Multi-purpose and easy assembly. Standard length 30 cm. Color white, black.

Option double floor






Climbing net knotted

Meshes: knotted square mesh.

- 250 mm : Ø 16 mm.
- 300 mm : Ø 20 mm.






Different net shapes: rectangular - trapeze circular.

Ropes: polypropylene, textured polypropylene, armed polypropylene.

Colors: green, blue, yellow, beige or havana.

With ring at each corner angle. Option: peripheral rope for fixing the net.







Kit chimney

Wooden square frame, with black non-slip exterior plywood half-bearing surrounded by 50 mm mesh netting. Kit for self-assembly.





Net colours: black, white, yellow, blue, green or red.






Wood chimney

Made of autoclave class 4 wood. Composed of modules 115 cm x 78 cm x 99 cm high. Pre-assembled, to be fixed to the other module every meter.

Bottom, intermediary and bottom module supplied.





The chimney

Rope Ø 16 mm

- Square mesh 250 mm.
- Equipped with a half landing every meter.
- In rope Ø 12 mm, mesh 100 mm, attached in a staggered fashion. Color: black.
- Ø of the chimney: 800 mm.
 1 m 1,20 m on request.
- Colors: green or beige.

Supplied with half landing.







Game modules



Rope ladder Beechwood bar Ø 30 mm and rope Ø 16 mm. With thimble and suspension rings at both ends. Color of the suspension rope green, beige, havana, blue, yellow or black.




Tarzan jump

Polypropylene textured rope Ø 30 mm.

- Thimble and suspension rings at the top.
- Reinforced grip at the bottom.

We can fix guides onto the rope for the implementation of safety measures.

Standard length: 3 m. Additional meter on request.



ANARA HO



Jumping ball

PVC balloon integrated into a wooden frame. To be fixed on cables. Supplied with mounting accessories. Colors according to stocks. Sold with inflator.

> **NEW** GAME

Cable spacing: 60 cm.



64 cm.

64 cm.



Game modules




The pencil

Class 4 autoclave wood colouring pencils painted. To be fixed between two cables. Supplied with assembly accessories.

The pastel

Ø 100 mm round post, in painted wood. To be fixed between two cables. Supplied with assembly accessories.

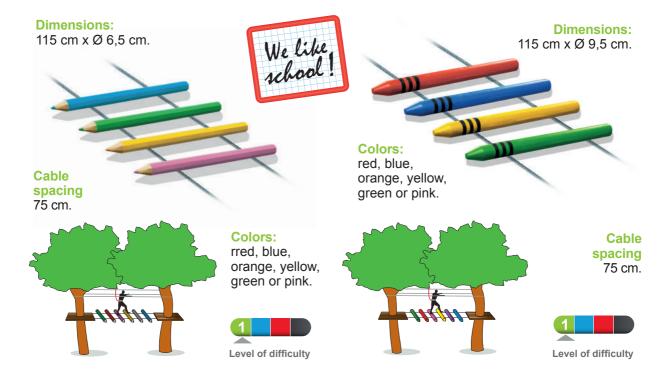

Game modules





Rubber

Foam rubber covered with blue and pink PVC, with wooden board to hold the module. Supplied with assembly accessories.

Multiplication tables

Exterior plywood coloured non-slip multiplication boards. Choice of 9 multiples. Supplied with assembly accessories.

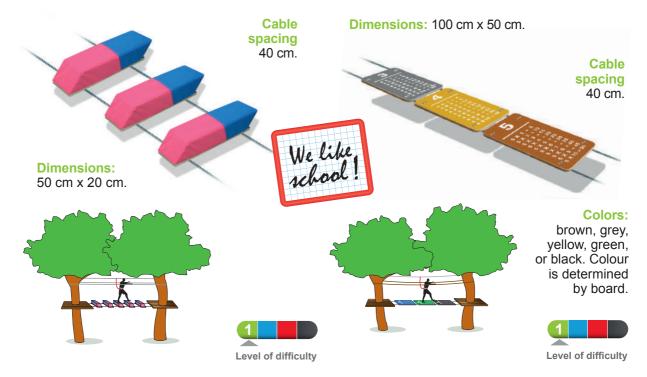

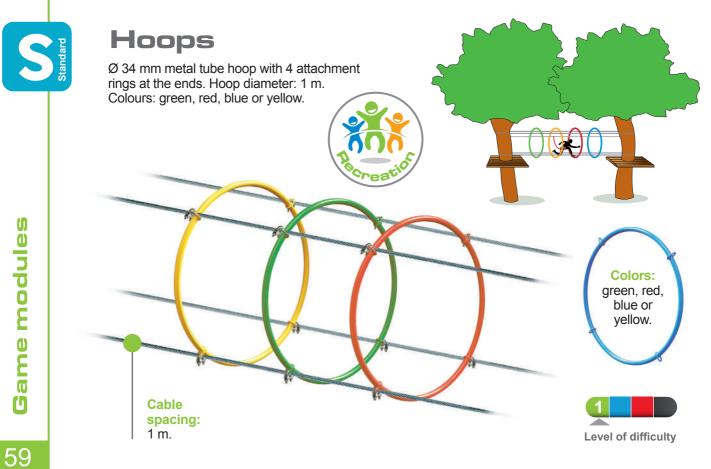



The beehive

Yellow non-slip exterior plywood, engraved and stained, thickness 15 mm. Supplied with mounting accessories.

Distance mounting accessories. between cables: Dimensions: 70 cm x 70 cm. 30 cm. 5 colours available. Distance between cables 63 cm. ing the last in Level of difficulty Level of difficulty

Flying plate

Wood frame, Class 4 autoclave, 4 cm thick,

with a coloured non-slip exterior plywood disc,

fixed on 2 Ø 16 mm black metal reinforced ropes. To be installed on two cables. Supplied with




Big foot

Foot-shaped non-slip oor, attached to 2 logs \emptyset 100 mm. Positioning of 2 cables parallel to the left and right of the game module.

Running log

Log Ø 120 mm.

- Treated timber class 4.
- Equipped with ball bearings and rings for attachment to cable support.

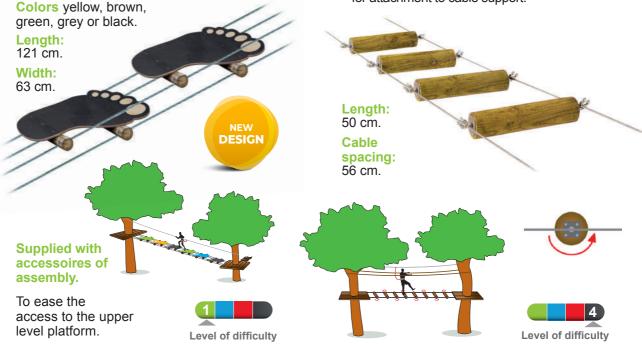


Pirogue bridge

Concave plank, treated autoclave class 4, 36 mm thickness, to put on 2 cables. Each plank comes with 4 wire rope tighteners.

The piano

Made of autoclave class 4. Equipped with a counter-weight with a design of piano.

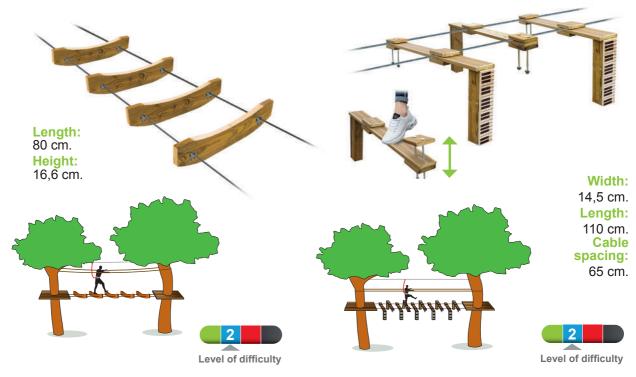

Standard

The pommel horse

Moving bridge

2 m wood element composed of:

- 4 straps width 50 mm.
- 2 wood logs Ø 100 mm
 - + threaded rod Ø 16 mm.
- 2 fixation rings at each end.



Sewn strap around the threaded rod.

This kit consits of:

- 1/2 circle Ø 500 mm.
- 10 pre-drilled planks autoclave treated, class 4. Length: 1 m.
- Comes with the required assembly accessories.



Color black.

Game modules




Colorful plank footbridge

Brown, yellow, grey, green, black non-slip exterior plywood birch planks. Thickness 15 mm. Dimensions: 500 mm x 145 mm.

Colorful Chinese footbridge

Brown, yellow, grey, green, black non-slip exterior plywood birch planks. Thickness 15 mm. Dimensions: 50 mm x 145 mm.

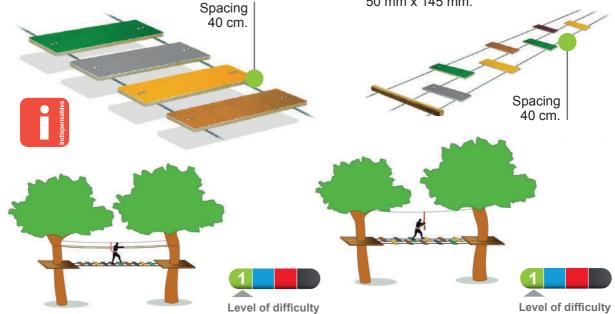



Short hops

2 logs Ø 100 mm.

- Treated Timber class 4.
- Equipped with a non-slip disc Ø 600 mm.
- Necessary assembly accessories.



Hand rope

textured polypropylene Ø 20 mm with thimble and suspension ring at the top and a reinforced grip at the bottom.

Discs colors

green, black, grey, brown or yellow.



We can also supply circular non-slip discs.

Available diameters: Ø 400 II 600 II 800 mm. Thickness: 15 mm.

Coloris


black, green, red, blue or yellow.




Fun islands planks

These wooden planks are a fun and educational game designed to enrich children's knowledge by discovering the forest: animal tracks, foliage, birds, etc...



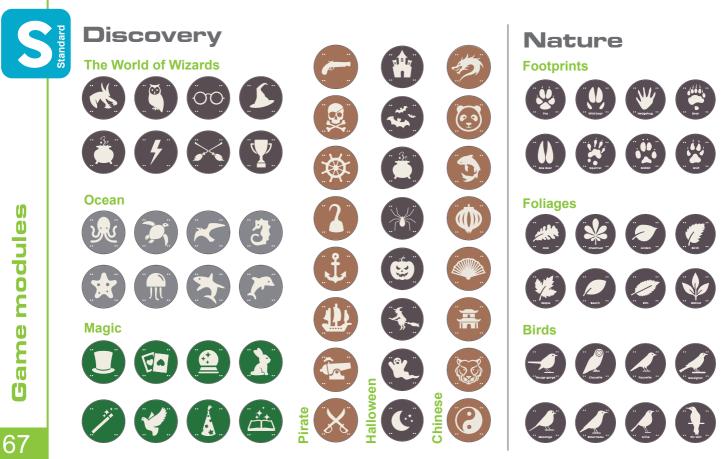

modules aNe

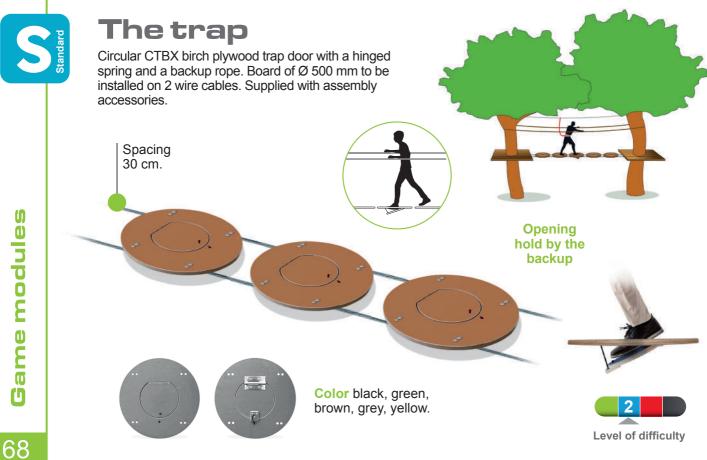

Game modules



The squirrel

Island plank made of engraved and varnished exterior plywood. Supplied with assembly accessories. Color brown.

Wire cable spacing: 0,40 m.


> **NEW** GAME





Halloween collection

Plank made of engraved and varnished non-slip exterior plywood supplied with assembly accessories. The collection is currently composed of **5 elements:** bat, pumpkin, bone, ghost, skull.

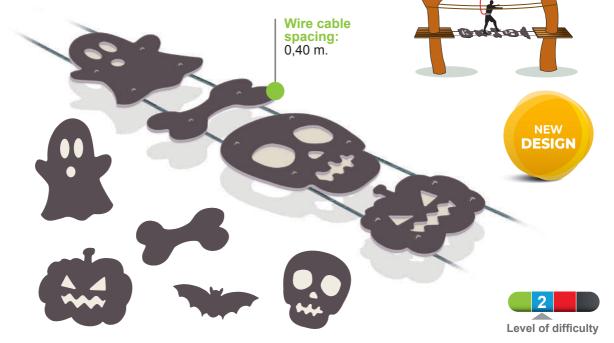




The Puzzle

Board made of CTBX exterior plywood in shape of piece of puzzle to be fixed on 2 wire cables including assembly accessories. Colors grey, black, green or yellow.

Smileys

Smiley designed from yellow or red CTBX birch plywood. Non-slip board, engraved, painted and stained. Installed on 2 wire cables. Diameter of the board: 500 mm. Spacing 30 cm.

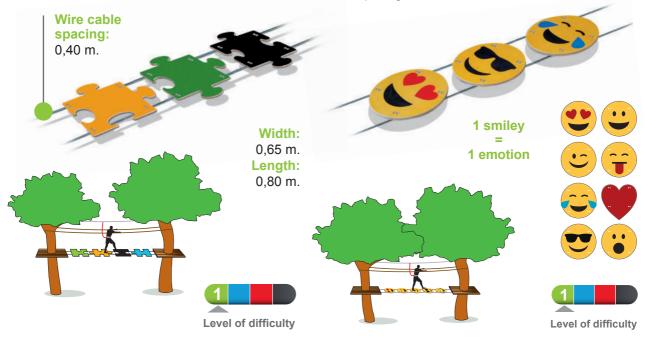




Candies

Collection of candies, made from colorful, engraved, painted and stained non-slip exterior birch plywood. Thickness 15 mm. Installed on 2 wire cables, supplied with assembly accessories.

Chocolate planks

Non-slip exterior black plywood, engraved and stained, thickness 15 mm. To be installed on 2 wire cables. Supplied with assembly accessories. Dimensions: 50 x 60 cm.

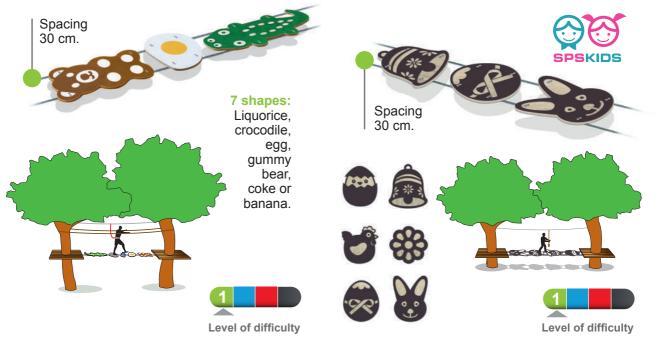



Jungle tunnel

Animals made of CTBX plywood, thickness 15 mm, engraved and stained. Path dimensions: 90 cm x 70 cm. Total dimensions: 1,22 m x 2,00 m.




The Enchanted tunnel

Exterior birch plywood for outdoor use, fixed on 4 wire cables. Dimensions: 1,10 m x 1,10 m, thickness 15 mm.

Available different shapes

Rabbit, apple, flower, heart, butterfly, cloud, acorn...



Hanging bridge

Apple and butter y shape

Non slip exterior birch plywood. Thickness: 15 mm. Supplied with 4 suspension ropescolor green or beige in rope Ø 16 mm and thimble and suspension rings at the top.

Wooden island planks

Shape: apple, butterfly, flower, rabbit, cloud, acorn, heart...

Non slip exterior birch plywood. Thickness: 15 mm. With assembly accessories.



Handing bridge and wooden island planks: colors brown, green, grey, yellow or black.



The Licorice Path

Made of exible rubber material width 250 mm, equipped with suspension ropes Ø 16 mm with thimble eye and suspension rope.



The Flex

Flexible rubber product to be fixed on two support cables.

Product description

- EPDM rubber.
- Triangular fixing rings.
- Reinforced with a metal plate inside.





140 mm

750 mm



Newton Ball

Monkey fist ball made of Polypropylene rope \emptyset 16 mm equipped with 2 ropes with loops loops and rings.





The slate

Class 4 autoclave wood frame with non-slip exterior plywood in the middle. Supplied with fixing accessories.

Dimensions: 49,50 cm x 35 cm.

Supplied with Ø 16 mm suspension ropes in polypropylene or textured Lenght 3 m. Self-assembly.



Suspension ropes length: 1 m ∎ 2 m 2,50 m. Can be used as a suspended or walk-on module



Benjewe

Cable

spacing 40 cm.

Game modules



The Waffle

Module made of 30 mm class 3 Okoumé plywood, rectangular shape with hollowed-out grid.



Spacing 40 cm.

Supplied with Ø 16 mm suspension ropes in polypropylene or textured polypropylene.

Dimensions 72 cm x 48 cm.

Length suspension rope: 1 m I 2 m I 2,50 m.


Can be used as suspended module or walking obstacle





The goki plank

Coloured non-slip exterior plywood, 15 mm thick, with geometric inserts. Equipped with coloured suspension ropes 3 m long.

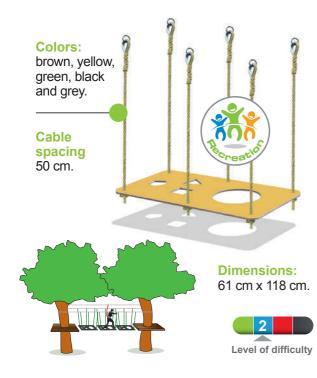

Double walking log

Wood module, Class 4 autoclave, equipped with two Ø 120 mm logs, length 300 mm, and a grooved board, length 550 mm, 27 mm thick.



Game modules



Log Ø 100 mm. Treated Timber class 4. With thimble and suspension rings at the top. Colors green, beige, havana, blue, yellow or black. Suspension lengths: 1 m I 2 m I 2,50 m.



Hanging skittles

Equipped with 2 suspension ropes Ø 16 mm. **Suspension lengths:** 1 m ∎ 2 m ∎ 2,50 m.



Log Ø 100 mm

Treated Timber class 4. Log length: 0,66 m. With thimble and suspension ring at the top.

Ropes colors: green, beige, havana, blue, yellow or black.



Level of difficulty

Colored hanging plate

Disc Ø 400 mm

- Non-slip exterior birch plywood.
- Textured polypropylene rope Ø 20 mm with thimble and suspension ring at the top.

Suspension lengths: 1 m I 2 m I 2,50 m.

Colors black. green, brown, grey and yellow.





Hanging anchors

Log Ø 100 mm

Treated Timber class 4. Log length: 0,66 m. With reinforced loop and suspension ring at the top. Ropes colors: green, beige, havana, blue, yellow or black.



Equipped with suspension rope Ø 20 mm.


Suspension lengths: 1 m ∎ 2 m ∎ 2,50 m.



Vertical log

Log Ø 120 mm

- Treated Timber class 4.
- Step attached to the log.
- Armed suspension rope Ø 16 mm with thimble and suspension ring at the top.
- Colors green or beige.



Log length: 1,80 m. Length with suspension rope: 2,50 m.




Flying carpet

Grooved planks

Treated Timber class 4. Equipped with suspension ropes \emptyset 20 mm. With reinforced loop and suspension rings at the top (to be assembled in a sawtooth fashion).

Tibetan bridge

Made with a walking rope in textured polypropylene \emptyset 30 mm, equipped with suspension ropes every 0,5 m textured polypropylene \emptyset 20 mm.

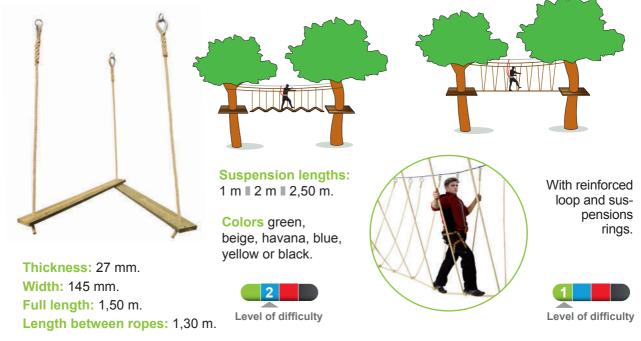


Hanging crosses Log: length 1,33 m, Ø 100 mm.

- Treated Timber class 4.
- Equipped with 4 suspension ropes Ø 16 mm.
- With reinforced rope and loop suspensions at the top.

dispensables 0

Colors

Suspension lengths: 1 m ∎ 2 m ∎ 2,50 m.



Hanging bridge Grooved planks with logs: length 0,66 m Ø 100 mm.

Level of difficulty

Standard


The net tube

Net tube

Equipped with a steel circle \emptyset 800 mm every meter.

Swing seat

Consists of 2 steel structures, grey color. Supplied with 4 grooved boards. Length: 1,50 m..

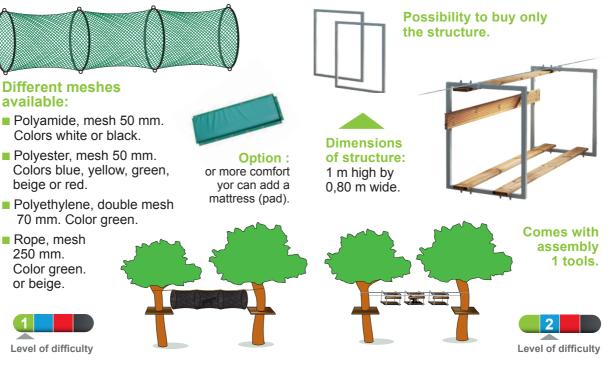



The honey spoon


Obstacle consisting of a Ø 100 mm autoclave class 4 post with a Ø 250 mm honeycomb larch base.

Ø 16 mm reinforced suspension rope crimped at each end, equipped with a thimble and fixing ring.

> Total height: 150 cm.



Balance pole

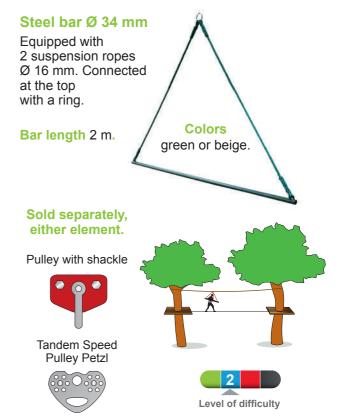



Open barrel


Circles Ø 800 mm with opening at the top to allow the continuous lifeline to pass through. Class 4 autoclave boards, pre-drilled to length.





be added for

more comfort.

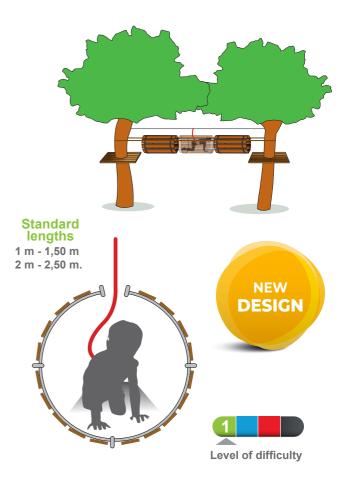



Barrel

Composing:

Circles Ø 800 mm. Wooden slats, treated timber class 4, pre-drilled with regardsto length required.




Standard lengths 1 m - 1,50 m 2 m - 2,50 m

Level of difficulty

The wave

Wave bridge, made with steel plate curved covered with gray plastic and fixed on grooved boards with bolts.



The gateway is equipped with a suspension ropes, Ø 16 mm, color green or beige. Childrens course: adujstable suspension ropes 1,50 m to 2 m. Adults course: adujstable suspension ropes 2,50 to 3 m. Bridge witdh: 0,50 m.



modules Game



Uneven circles

Steel circle \emptyset 1 m with a 30 cm tube welded to it.

Equipped with 2 plates welded to the circle for attaching the wire rope.

To be installed in a staggered fashion.





Bascule bridge

Wooden module treated class 4, lenght 2 m, made with a grooved wooden plank, attached to a hinge galvanized steel.

> Place the bridge on 2 ropes with a spacing of 40 cm between them.

Supplied with assembly accessories.







Rope loops

Rope Ø 16 mm Standard length: 0,56 m. Colors beige, yellow, blue or black.

<u>furnt, gund</u>

U-form rope

Rope Ø 20 mm

Reinforced suspension loops and rings at both ends.

Colors beige, blue, yellow or black.

Standard lengths: 2 ou 4 m.

2 Level of difficulty



Game modules


The "ravioli"

PVC ball enclosed in a black ravioli-shaped walking net. Net equipped with a ring at each corner. Not Supplied with rope tightener for assembly. Dimensions: 75 cm x 75 cm.

Pika Pika

A Ø 300 mm yellow sphere with two handles equipped with 2 polypropylene suspension ropes Ø 16 mm with thimble and suspension ring.

Length of suspension ropes: 2 m.

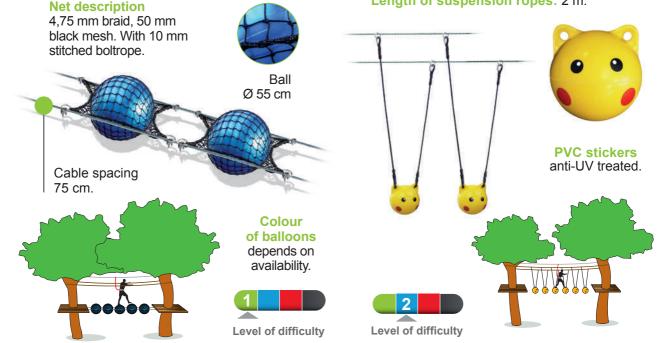





The sailor bridge

Level of difficulty

«Polyform» boat fender, length 60 cm. The fender is assembled on $2 \times \emptyset$ 16 mm polypropylene ropes, color green or beige, with thimble eye and ring at each end.

The pirate obstacles

«Polyform» boat fender, length 1 m. The fender is equipped with a Ø 12 mm elastic rope + a suspension ring at each end.



The ship's **A** boy swing

«Polyform» boat fender, length 1 m. The fender is equipped with 2 x \emptyset 20 mm polypropylene ropes, color green or beige, with a thimble eye and ring at the top and a knot at the bottom.

Level of difficulty

Sailor

Color of the suspension rope: green, beige, havana, black, blue or yellow.

X X X X

Level of difficulty

Sailor Concept




Rope rings Thimble and suspension rings at the top. E 8 Ring Ø 200 mm at the

bottom for hands

Suspension rope Ø 16 mm. Colors beige, havana, blue, green, yellow or black.



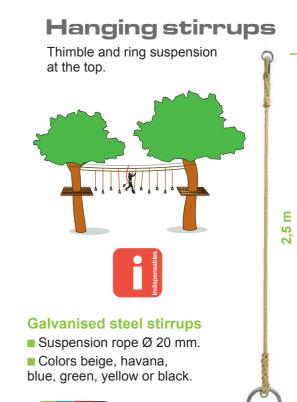





Climbing planks



Plank Thickness: 29 mm. Width: 145 mm.

Plank height: 2 m. Spacing of wire ropes: 1,90 m.


Treated Timber class 4. Equipped with 5 inserts, 2 climbing holds and the accessories to attach the plank to the 2 wire ropes.

The planks should be placed every 0,50 m or every 1 m.



Coco Tarzan

Polypropylene Monkey ś fist ball Ø 150 mm, equipped with a suspension rope Ø 16 mm with thimble and suspension ring at the top.

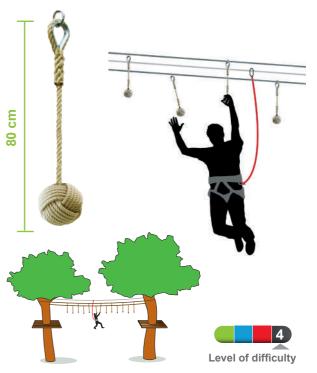



Suspended fry

Foam cylinder covered with a green PVC protection, provided with 4 hanger straps sewn on a ring.

Standard color: green.



Foams length: 1,50 m. Colors other on request.




Smiley

Foam obstacle covered with a PVC tarpaulin, equipped with fixing eyelets in the upper part. The smiley is an adhesive sticked on the tarpaulin.

TACOTAC

Foam obstacle with a density of 30 kg/m3 and is covered with a PVC tarpaulin. Equipped with a polypropylene (synthetic hemp) suspension rope \emptyset 20 mm. Length 2,50 m.





Color green.
Dimension: 1 m x 1,50 m.



Level of difficulty

Jungle tracks


2 modules to create different games.

- Round steel tube Ø 800 mm. Color grey.
- Steel bar (tube) straight or curved.
- Mesh net size 100 mm, without knots, black polythene.
- Rope size Ø 12 mm.

Net without knots, diamond mesh.

Customizable course. Possible to be sold per unit.

Numerous forms available



Level of difficulty

96

Game


modules

Speed cube

Wooden cube with coloured non-slip exterior plywood panels forming a speed cube to be fixed to two parallel cables. Supplied with mounting accessories.

Dice

Cubes made of Okoume plywood panels painted white with black dots for the numbers. Mounted on two rotating axes.

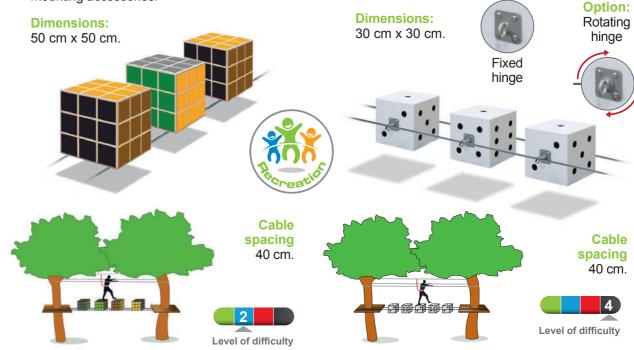

Premium


The Farm collection

Made of CTBX black plywood, stained and engraved, thickness 15 mm. To be installed on the wire cable. Supplied with assembly accessories. Dimensions change regarding the shape. Wire spacing:40 cm.

Mushroom Picking Collection

Black, brown and yellow mushroom made of CTBX birch plywood. Engraved, and stained non-slip planks. Installed on 2 wire cables. Supplied with assembly accessories.

Dimensions: around 65 cm x 85 cm.

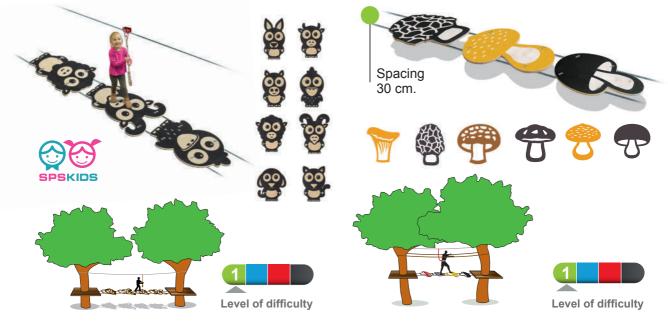


Animal metronome

Animals made of CTBX plywood, thickness 15 mm, engraved and stained. To be mounted on swing wood rafter. To be assembled on 2 bottom cables. Everything is supplied to mount the element yourself.

The Brick

Okoume wood, core made of popular covered with exterior wooden painting. To be fixed on 2 parallel cables. Assembly accessories included.

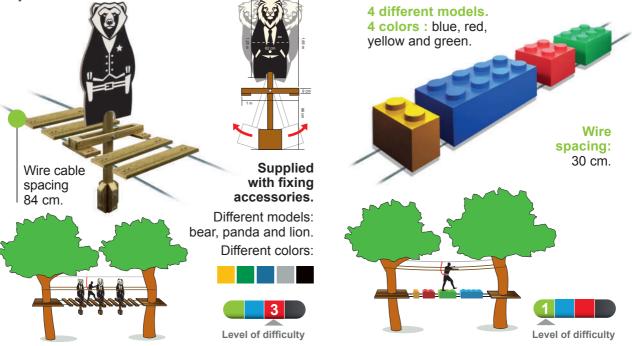


Premium

Savanna crossing

Island made of Okoumé, thickness: 18 mm, Ø of the plank : 500 mm. Supplied with assembly accessories. Recto/verso printing available as option.

Little monsters

Island made of Okoumé, thickness: 18 mm. Dimensions: 1,02 m x 0,95 m. Recto/verso printing available as option.

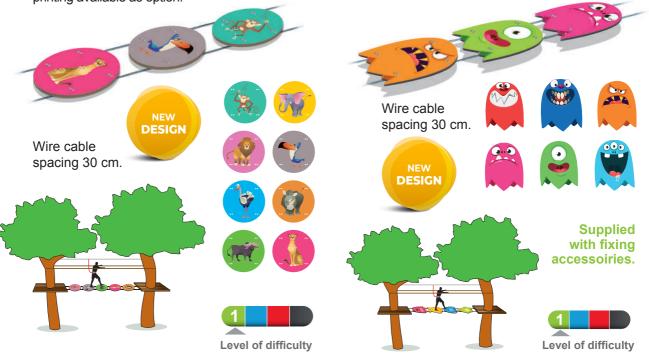


Game modules

Flowers' path

Made of colored CTBX plywood, thickness 15 mm, engraved and stained. Dimensions: 0,50 m x 0,50 m. Supplied with assembly accessories.

Leaves path

Non-slip CTBX exterior plywood (yellow and green) engraved and stained thickness 15 mm. To be installed on 2 parallel cables and supplied with assembly accessories. Dimensions : 50 cm x 60 cm.

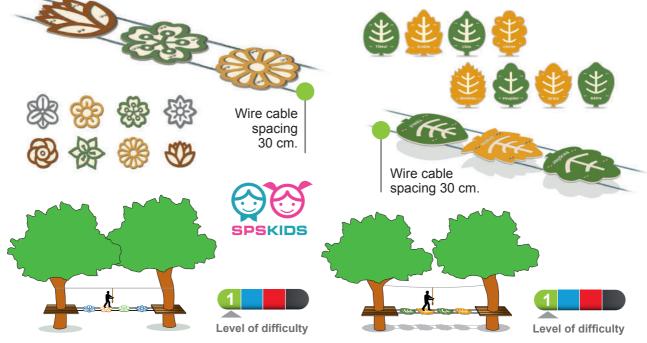

Game modules

Hopscotch

100 cm

Made of 8 elements of non-slip exterior plywood, 15 mm thick engraved and stained. Supplied with assembly accessories.


The crossing of the Knights

Shields are made of class 3 Okoumé plywood. To be fixed on 2 cables. Board supplied with fixing accessories. Width: 58 cm. Length: 66 cm. Thickness: 18 mm. Bay Eagle Crown Leopard Lvs Wire spacing Pegasus Dragon 40 cm. **Supplied** with fixing accessoiries. (Gagagama) Level of difficulty Level of difficulty



The bee cell

Tunnel made of 90 x 90 mm square wood and yellow bungee cords, diameter 12 mm. To be fixed with supplied wire rope saddles.

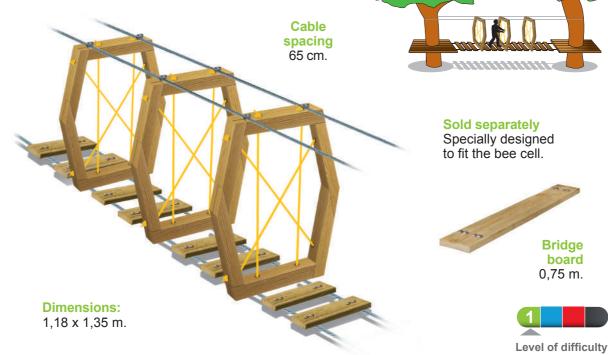

Premium

Yo-yo

Larch Yo-yo class 3, with a Ø 30 mm PP or textured PP suspension rope, with thermo sheath, thimble loop and fixing ring at the top.

Length suspension ropes:

1 m ∎ 2 m 2.50 m. Spinningtop

Larch spinning top, class 3, suspended from a Ø 16 mm reinforced rope, with thimble and ring at the top.



Level of difficulty

Yo-yo dimensions: 26 cm x Ø 30 cm.



ې 🤠 🖞

1 m ∎ 2 m ∎ 2,50 m.

Top dimensions:

37 cm x Ø 32 cm.

Length

ropes:

suspension

Rope colours

The little ball

Class 3 larch sphere, with painted cat's eye, suspended from a reinforced rope \emptyset 16 mm, with thimble and fixing ring at the top. Paint available on request: blue, yellow, red or green.

Length suspension ropes:

1 m ■ 2 m ■ 2,50 m. Diameter: 30 cm.




Game modules

The Armed Stairs

Made of Ø 16 mm armed rope, crimped with a thimble and fixing ring. Equipped with a handrail and steps in autoclave class 4 wood. Module length 2 m overall, greatest height 3 m. Sold by the linear meter.

The Split


Made of Ø 16 mm armed rope, crimped with a thimble and fixing ring. Equipped with a handrail at mid-height and three autoclave class 4 wood turning logs. Length 2 m - 4 m - 6 m.

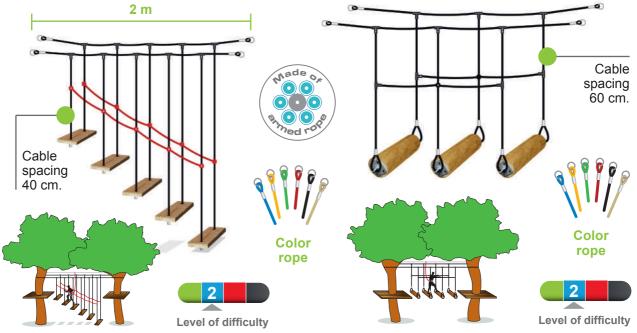


Game modules

Armed steps


Made of Ø 16 mm armed rope, crimped with thimble and fixing ring. Equipped with autoclave class 4 wood steps arranged in staggered rows. Steps spacing: 50 cm. Sell to linear meter.





The Path of 3 Ropes

In "U" shape, installed in single file with 30 cm between each "U". The first and last rope are installed at 50 cm from the start and 50 cm from the end. It is made of \emptyset 16 mm armed rope. Spacing 80 cm.




The armed rope chimney

Made of Ø 16 mm armed rope, 250 mm mesh, crimped with a thimble and fixing ring. The chimney is equipped with landings and half-landings in black, yellow, green, grey or brown non-slip exterior plywood.

Rotating Ladder

Made of Ø 16 mm armed rope, crimped with thimble and 360° swivel hook. Equipped with green plastic rungs. Total height: 240 cm. Spacing: 40 cm.

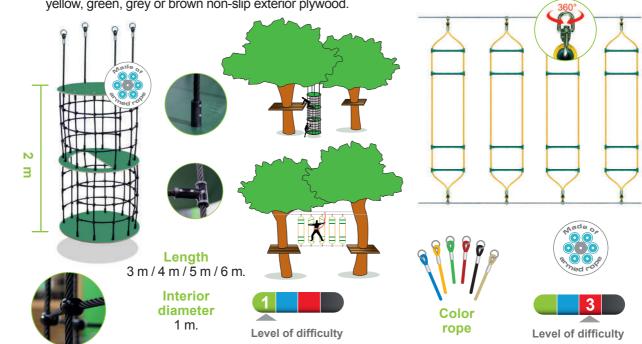

Game modules

The rope with brackets


Made of Ø 16 mm armed rope, crimped with a thimble and a fixing ring at the top. Yellow brackets Ø 80 mm arranged at regular intervals along the length of the rope.

Color rope

Length 3 m / 4 m / 5 m / 6 m.

SPSKIDS

The armed hand rope

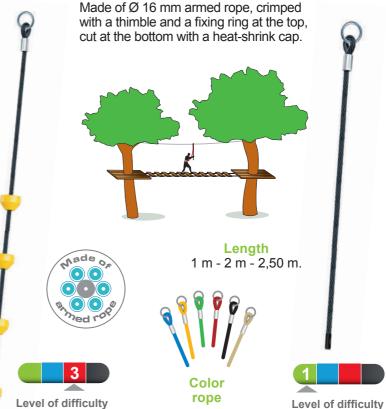


modules Game



108

Level of difficulty

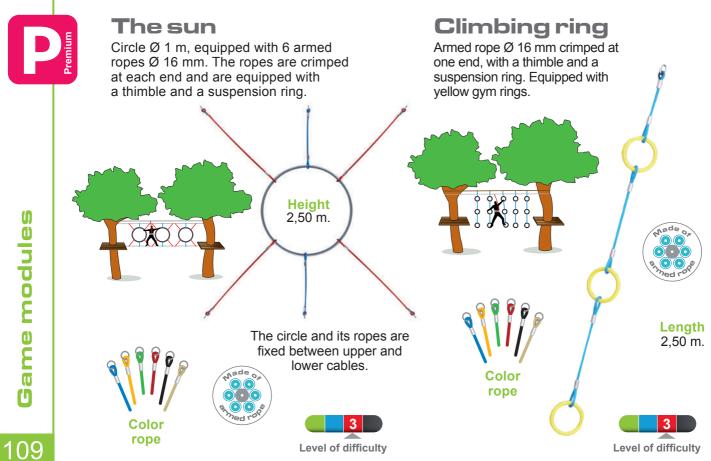


The star

Obstacle made of armed rope Ø 16 mm equipped with thimble and suspension ring with a central part made of grooved non-slip exterior plywood. Color brown.



Zig Zag bridge

Made of grooved planks. Thickness: 36 mm equipped with armed ropes Ø 16 mm crimped with thimble eye and suspension ring.

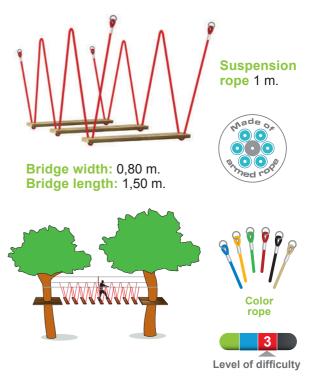


Game modules

Brazilian ladder

Ladder with aluminium rungs held in place by two Ø 16 mm reinforced ropes with thimbles and fixing ring at each end. Swivels at the ends for rotation of the ladder.


Caving ladder

Ladder with 28 cm aluminium rungs, held in place by two Ø 16 mm armed crimped ropes, with thimble and fixing ring at each end.

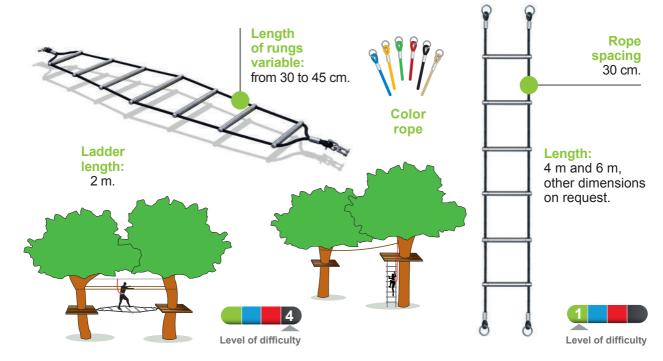

The snake pole

Square wood rafter 90 x 90 mm equipped with an armed rope \emptyset 16 mm for the feet at the bottom.

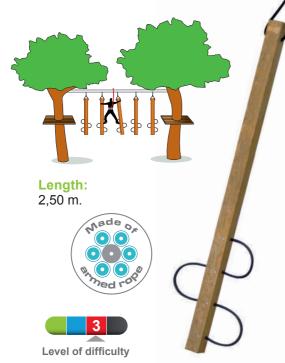

Rope Ladder

Armed rope Ø 16 mm equipped with reinforced PP rungs. The rope is crimped at each end and is equipped with a reinforced loop and a suspension ring.

Width: 400 mm.

hade









Level of difficulty

Himalayan bridge

Made of Ø 16 mm crimped armed rope with thimbles and suspension rings, reinforced PP rungs. Equipped with a high and a low handrail.





Made of armed rope with a convex path. Green bar spaced of 40 cm from each other. Made of Ø 16 mm armed rope. Length: 4 m (effective length: 3 m).

Color

rope



Suspension height 2,50 m.


Width 400 mm.



Level of difficulty

The loop

Armed rope Ø 16 mm crimped at one end, with a thimble and a suspension ring. Provided with a Ø 16 mm rope stirrup in the lower part.



Length: 2,50 m



Color rope





rope

Level of difficulty

Rope bridge

Armed rope Ø 16 mm crimped at each end. Equipped with a thimble and a suspension ring.

U-form rope

Armed rope \emptyset 16 mm crimped at one end, with a thimble and a suspension ring.



Suspended banana

Banana-shaped foam covered with yellow PVC sheeting, fitted with 4 suspension ropes sewn onto a ring.



Total foam length: 150 cm x 47 cm.



Length at ends: 31 cm x 35 cm.



Coco Monkey

Polypropylene Monkey ś fist ball Ø 300 mm, equipped with a suspension rope Ø 20 mm with thimble and suspension ring at the top.



Pyramid

Composed of:

- 1 wood base treated autoclave class 4.
- 4 reinforced aluminum bars Ø 30 mm.
- Exotic wood head.
- Brake nut Ø 24 mm.
- Armed suspension rope Ø 16 mm crimped at each end with a thimble and a suspension ring.

Dimension of the base 80 cm x 80 cm.



117



Height 2,80 m

The Step

"Polyform" boat fender equipped with a suspension rope \emptyset 20 mm with thimble eye and suspension ring.

Length 2,50 m.



Length Sailor Concept



The Swing of the Captain

"Polyform" boat fender in arch shape equipped with 2 suspension ropes Ø 20 mm with thimble eye and suspension ring.

Color of the suspension rope

green, beige, havana, black, blue and yellow.



Length of the suspension rope 2,50 m.



Cocoon

PVC Ball Ø 60 cm covered with a polyamide mass-colored net, braid 5 mm and mesh 25 mm. Color green.





Other use Game for zip-line




Donuts

Rubber tyre Ø 55 cm covered with a polyamide mass-colored net, braid 5 mm and mesh 25 mm. Color red.



Color Bag

Sack made of rope Ø 16 mm. Diamond mesh: 150 mm. Sack Ø 600 mm, height 2,40 m equipped with 2 suspension ropes with thimble. Filled with colored foam cubes.



Wrecking Ball

Sack Ø 600 mm. Heigth 1,20 m. Rope Ø 16 mm. Diamond meshes 150 mm. PVC Ball Ø 600 mm. Equipped with 2 suspension ropes with thimble.

Colored foam cubes or peanut balls sold separately.




Game modules

Pirate swing

PP rope (140 x 140 mm) equipped with reinforced suspension rope (\emptyset 16 mm). Available in 3 lengths: 1,35 m, 1,85 m and 2,35 m. Suspension ropes have a V form.

Fisherman bridge

Rope Ø 100 mm, in textured polypropylene provided with 2 different lengths of suspension ropes fixed every 1,50 m.

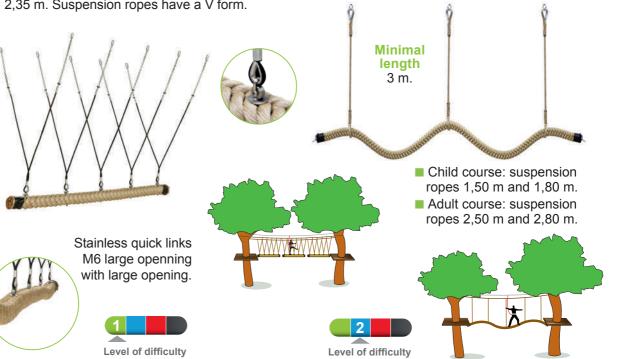



Coconut swing

Braided Polypropylene swing length 60 cm equipped with two polypropylene suspension ropes \emptyset 20 mm with thimble and suspension ring. Length rope: 2,50 m.






Game modules

122

2,50 m

The Tyre

Made of molded black polypropylene, equipped with 2 suspension ropes Ø 16 mm with thimble eye and suspension ring.



Length: 2,50 m.

Color of the suspension ropes


green, beige, havana, black, blue or yellow.



Level of difficulty

Climbing wall

Climbing wall made with planks class 4 and provided with inserts and with a set of climbing holds.



Module dimensions 2 m x 3 m.



Possibility to connect them with a connecting part.



Climbing fresco


Wall planks made of Okoumé wood, thickness 18 mm, dimensions: 1,22 m x 2,00 m. Wood printing. Supplied with a bundle of 30 climbing holds* and accessories. Option: customizable theme.



Nature


Wire cable spacing 1,80 m.

* Colors of the climbing holds according to the available stock available.






Chinese



Street'art





Enchanted climbing wall

Wood structure, height 2 m, to fix on a hig-cable and on a low-cable. 2 plywood boards: one above and one below. Both are equipped with holds. Assembly accessories included.




- 1 Hand and foot holds Climbing holds*
 - * Socket colors according to available stock
- 2 Plank

Available colors brown. yellow, grey or black.



Zebulon

Anti-slip disc Ø 300 mm mounted on a red spring. Spring is fixed to a floor Ø 600 mm.

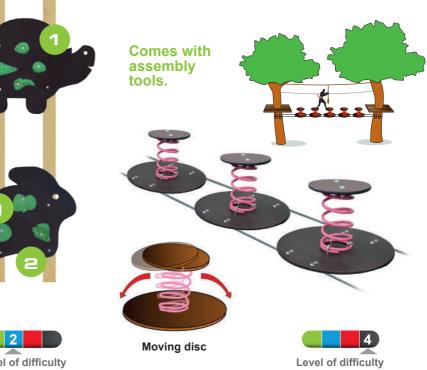


Jungle wall

Animals made of non-slip exterior plywood, thickness 15 mm, engraved and stained, to be fixed on 1 upper and 1 bottom cable. Dimensions: 1,22 m x 2 m. Form : Panda, Bear or Gorilla, to be specified. Supplied with assembly accessories.

Ghosts


Suspended wood ghost head. Equipped with 2 galvanized chains. Plywood thickness: 15 mm.

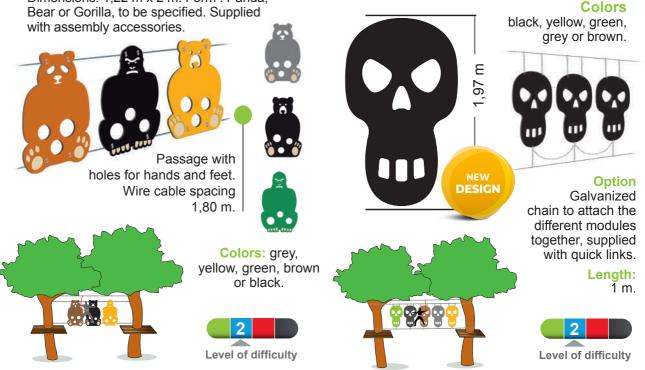

Game modules


Infernal roll

Roll made of polyethylene high resistance equipped with protection mattress, thickness: 20 cm with suspension ring. Color: red.

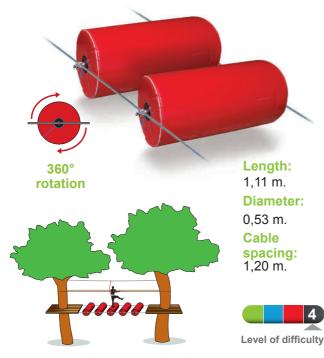

Speed wheel

Cleaned tyre equipped with 2 discs made of red grooved non-slip exterior plywood mounted on a rotating axis. To be on 2 wire cables.

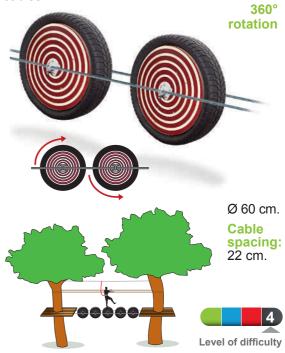

Game modules

The Basin

Genuine wooden basin mounted on 2 connector boards equipped with a rotation axis. Fix on two support cables.



Basin height: 35 cm. Basin length: 66 cm. Cable spacing: 72 cm.

Wine-Grower Passage

Genuine wooden barrel mounted on 2 connector boards equipped with a rotation axis. Fixed on two support cables.

Level of difficulty

Dimensions

Barrel heigh: 66 cm. Barrel length: 95 cm. Cable spacing: 100 cm.

Possible use as a horizontal game module.



Level of difficulty



The Gallic challenge


Genuine wooden barrel mounted on 2 connector boards equipped with an rotation axis.

Dimension: Ø 32 cm.

Height: 44 cm.

Commando net

Net made of 35 mm polyester straps, 150 mm mesh. Equipped with suspension rings every meter. It can be used either as a climbing net or walking net.

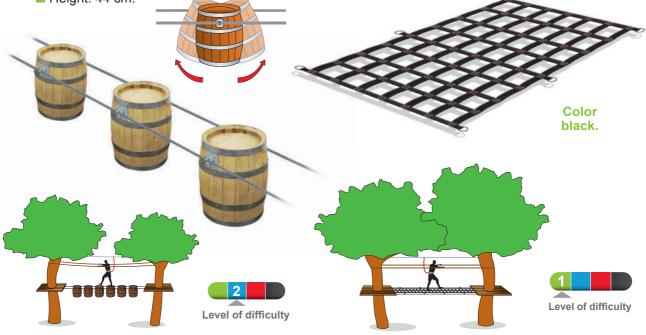


Anchor island

Made of Okoume exterior plywood, thickness 25 mm, stained. Supplied with the assembly accessories.

Bretzel

Made of Okoume exterior plywood, thickness 25 mm, stained. Supplied with the assembly accessories.

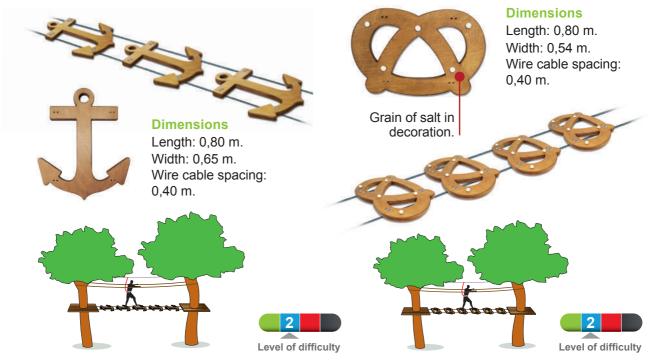


Mushroom

Solid wood mushroom, hat Ø 300 mm. With mounting accessories.

Bump

In atable 1/2 sphere. Color black. To fix on wire ropes, Ø 600 mm. Comes with assembly accessories.

Color: black.

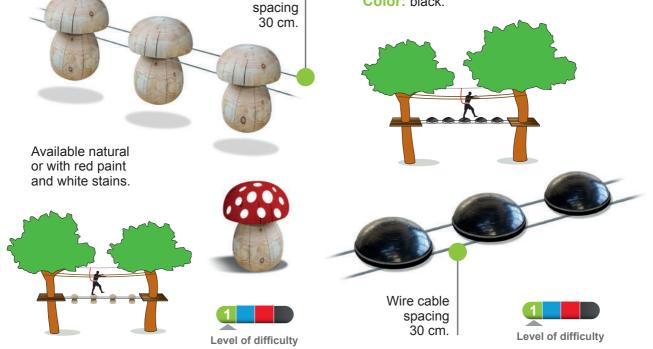

Wire cable

modules

Game


132

The Bunch

Black or green, engraved and varnished nonslip exterior board. Supplied with assembly accessories.

Zoo collection

Plank made of engraved and varnished non-slip exterior plywood supplied with assembly accessories. The collection is currently composed of 8 elements: **the lion, the zebra, the elephant, the panda, the crocodile, the monkey, the rhino and the koala.**

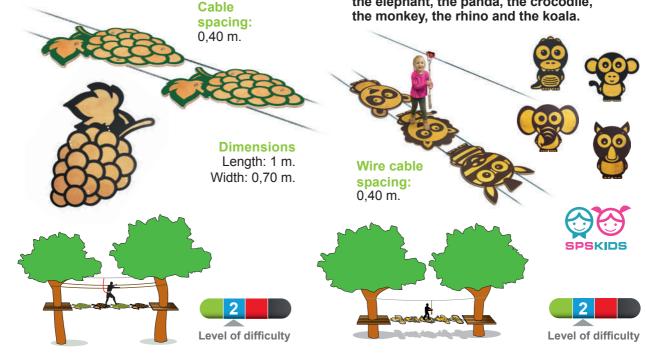


Walking eggs

Yellow, green, brown, exterior non-slip plywood, engraved and stained. Thickness 15 mm. To be installed on 2 wire cables. Supplied with assembly accessories. Dimensions : 50 cm x 60 cm, thickness 15 mm.

Big eggs


Yellow, green, brown, exterior non-slip plywood, engraved and stained. Thickness 15 mm. Vertical fixing on 4 wire cable. Dimensions: 180 cm x 122 cm. Path: 90 cm x 75 cm.

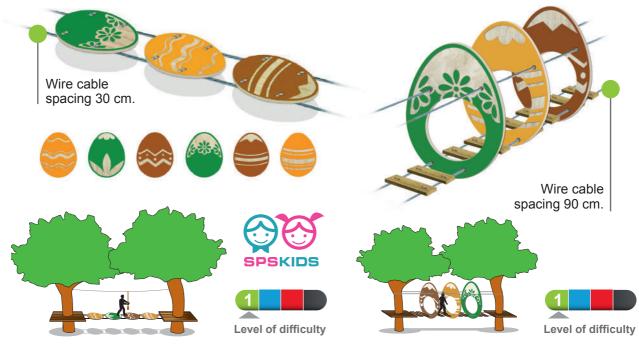

Alphabet footbridge

Customize your suspended bridge by displaying a theme, the color of your course, the name of your park, etc...

Colors yellow, brown, grey or black.





Game modules

Lion's head

Non-slip exterior plywood in the shape of a lion's head to be fixed on 4 wire cables. Color: brown.



Height 1,95 m. Width 1,70 m.





Other shapes available on request.




Pulley for rolling games

Pulley with a stainless steel shackle

(breaking point 2T400 coef cient 5). Equipped with plastic wheels to prevent premature wear of the wire rope.


Tandem Speed Petzl


It is the fastest carriage pulley. It is specifically designed for lower-angle zipline traverses.

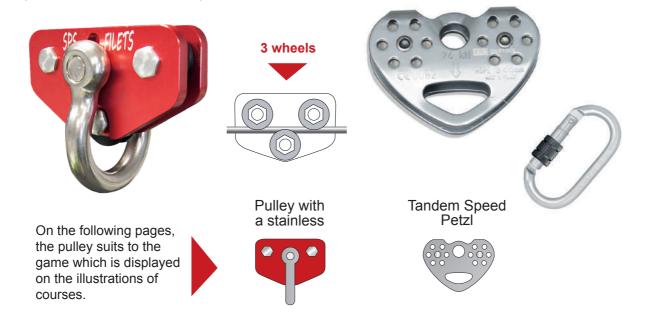





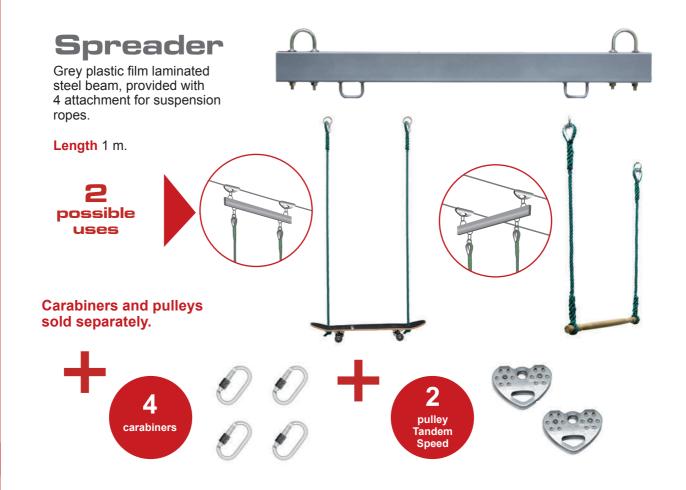

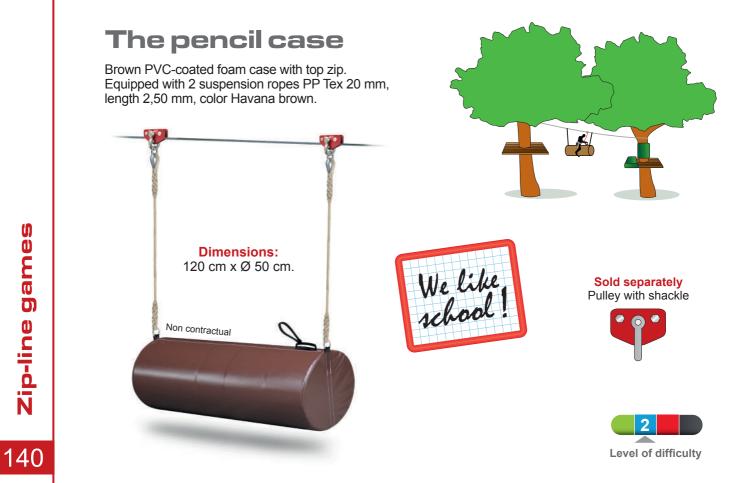


Rising zip-line

We offer you a new solution to reach the upper platform for an obstacle change. To move easily.

Composed by:

- 2 splices with thimble in a ring connected to a pulley by a swivel.
- Anti-slip seat board connected to 2 x Ø 100 mm logs treated autoclave class 4.
- Spreader log.
- Polypropylene ropes (similar to natural hemp)
 Ø 16 mm.
- Central splices.

Dimension ground 80 cm x 80 cm. Height: 1,80 m.

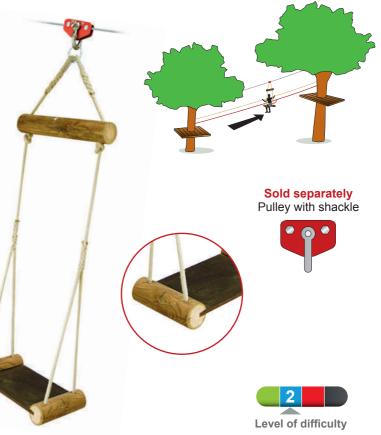

The Sphere

"Polyform" red boat fender Ø 800 mm, equipped with one suspension rope Ø 30 mm.

The hoop

Braided swing made of masscolored polyamide consisting of a tire seat. Supplied with a straight shackle CE Ø 16 mm.


Heavy-duty suspension. Hanging with straight shackle.



Flying anchor

Made of Okoume exterior plywood, thickness 25 mm, stained. Supplied with the assembly accessories.








Dimensions Length: 0,80 m. Width: 0,65 m.



Pirate zip

Polypropylene Monkey's fist ball Ø 300 mm, equipped with a suspension rope Ø 30 mm with thimble and suspension rings.

Total length: 2,50 m.




Sold separately Tandem Speed Pulley Petzl





Zip-line swing for kids

Galvanized steel hanging chain with a black PVC sheath. Length 2,50 m.



Sold separately Tandem Speed Pulley Petzl



Rubber disk Ø 400 mm.



Level of difficulty

Baby Ball

Buoy (swing)

- Suspension rings and galvanized steel rings (in the shape of a 8).
 Adjustable polypropylene suspension rope Ø 12 mm from 75 cm to 1,50 m.
- Polypropylene parts, color black.
- Supplied with a valve.

Not in ated. Colors red.

Sold separately

Tandem Speed Pulley

Petzl

The ball

Coconut fiber ball Ø 350 mm

- Equipped with a textured polypropylene suspension rope Ø 30 mm.
- Thimble and suspension ring at the top.

Rope length: 2,40 m.

Sold separately Tandem Speed Pulley Petzl






Level of difficulty



Level of difficulty



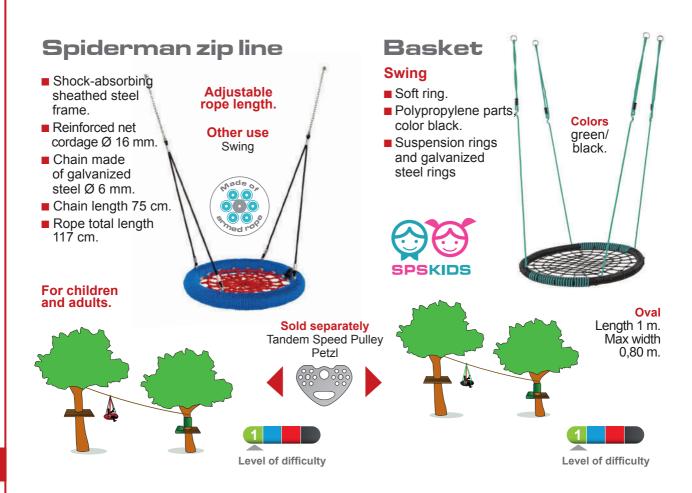



Trapeze

Wooden trapeze Ø 30 mm


Thimble and suspension rings at the top.

Equipped with 2 suspension ropes Ø 16 mm. Length 1 m.



Cable spacing 70 cm.






Sold separately Tandem Speed Pulley Petzl






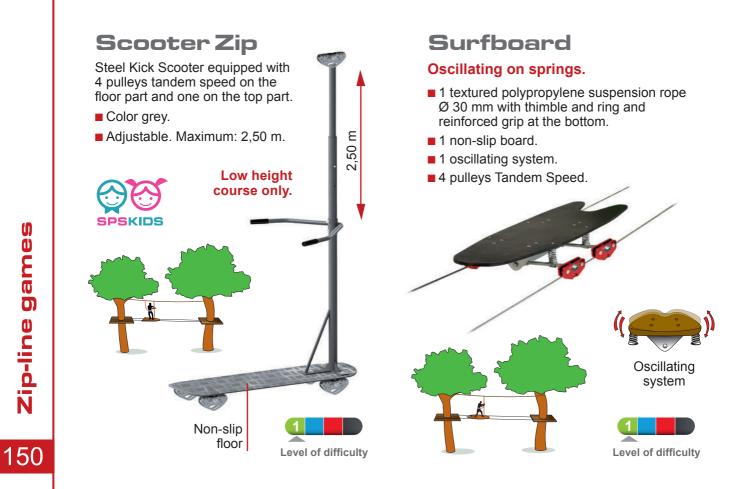

Sledge Wood sledge, mounted on a pine wood structure, maintained by threaded rods Ø 16 mm, protected by an aluminium sheath. Equipped with 4 Nylon pulleys wheels. Length: 90 cm. Level of difficulty

Fun Box

Manufacturing custom net cages with landings, labyrinth, partitions to move safely. Suitable for childrens and adults.







Level of difficulty





Available color Roof



Available color Sides and roof





Course without harness or Sea of Nets

We craft tailor-made polyamide nets, 50 mm mesh for courses without harness. Nets meet the requirements of EN 1263-01 Standard.



Available color Roof



Available color Sides and roof








Access door for Funbox or course without harness allows to secures the enter of the module Made-to-measure.





Door equipped with a bolt can have a padlock to close completely the access.

Pre-stretched halyard

Pre-stretched halyard Ø 10 mm, made of white core polyester and polypropylene cover. For net fixing and tension.







Photo credits - Arboricorde.



Set n°1 - Climbing holds for kids

for young climbers. These holds are suitable for vertical surfaces or inclines.

Set of 22 - Color red.





Set n°2 - Climbing holds for adults

Various holds for hands and feet. This set will enable you to start a 7 m route. Set of 50 - Color yellow. Set n°3 - Climbing holds for adults

Surprising and atypical forms. For competitors and beginners.

Set of 30 - Color green.



Foam protection

Foam density 20 kg/m3 covered with a PVC tarpaulin. Colors on request: blue, orange, red or yellow.

Other dimension on request.

Preformed Ø inside 55 cm. Height 90 cm. Thickness 10 cm.

Standard

0,90 x 0,90 x thickness 0,10 m. 1,50 x 0,90 x thickness 0,10 m.



3 adjustable straps.

Color green.



Bibs and eyelets.



Platform protection Equiped with aps

and eyelets. Dimension: 0,30 x 0,30 x 1,50 m. Thickness: 10 cm. Other length available 1 m.

Angle mattress platform protection

Foam mattress shaped for edges of platforms, thickness: 5 cm covered with a PVC tarpaulin 600 g/m2.



Dimensions 0,70 m x 0,15 m x 0,21 m.



Comfort mattress for Chimney

Foam mattress for Chimney covered with a PVC tarpaulin 600 g/m2 with bibs and eyelets.

Dimensions

Ø 800 mm x 20 cm thick.

Color green.

Colors available on demand







Mattress for zipline (arrival platform)




Foam mattress density 20 kg/m3 covered with a PVC tarpaulin with bibs and eyelets. Dimension: 0,80 x 1,60 x 0,20 m. Thickness: 20 cm. Color green.

With or without footprints.

Jump mattress for reception

Foam mattress density 20 kg/m3 covered with a PVC tarpaulin 600 g/m2 with 8 fixing eyelets.

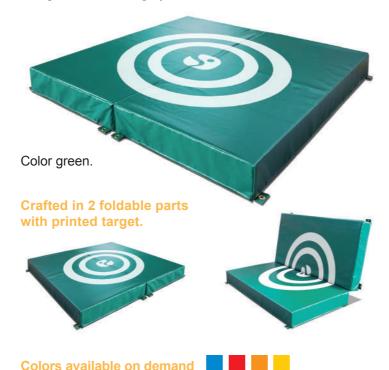

Unfolded dimensions: 2 m x 2 m x 0,20 m.

Folded dimensions: 2 m x 1 m x 0,40 m.





Foam protection for cables

Foam covered with a PVC tarpaulin.

Color green.

Dimensions: Length 400 mm Width 310 mm.







Aluminium Pulley buffer

Aluminium part for wire ropes Ø 12 mm.

> Pulley buffer DÉVAL' CÂBLE

RODEO-STOP Automatic fall arrest device with stainless steel shock absorber.

Compact energy absorber

Absorbs energy in the event of a fall by tearing its strap, thus limits the impact suffered by the user.

ZIPSTOP

Self-regulating magnetic braking system for zip-lines.



Magnetic induction braking technology.



ZIPSTOP Speed up to 24 km/h.



QUICK Flight

This device offers an exalting experience of free fall for aerial rope courses, jump towers, fun areas etc.

TRUBLUE

The next generation of indoor and outdoor climbing wall auto belays.



TRUBLUE iQ It covers a large range of weight: 20 to 150 kg.

ZIPSTOP SPEED

The best break for ziplines, it breaks up to the speed of 72 km/h.



QUICK Flight XL

Also available in XL size to jump from 12 m to 13 m.



TRUBLUE Speed

Its advantage is the quick retraction specific to climbing contests and 166 trainings.





We also supply

Spirale marking

High density spiral marking for cables with 9 - 13 mm diameter.



red

Elastic strap Ø 9 mm Reel: 100 m. Color black.



Abseiling rope

Diameter: 4 mm. Reel: 100 m.



Ropes

In reel. Color: green, beige, textured havana, white, black.

Rope «INDUSTRIE»

Polyamide Ø 12 mm, breaking strength 4200 daN (kg): 50 m I 100 m I 200 m I 500 m.





accessories Ser Ĵ



ASCENT harness

All-round adjustable harness, with a lumbar belt with an ergonomic and robust design that provides optimum support.



Enfant one size XXS.

Adult XS - XL.



Carabiner KAYAK Large carabiner, can be used as a large material holder.

Carabiner LIME-S Classic

carabiner, compact and resistant.



FLIK harness for kids

Adjustable full-body harness, equipped with two fixed attachment points. For children weighting less than 40 kg. One size.





MOON helmet

Robust and easy-to-wear helmet, developed for collective use. Color green /dark.









JAG SYSTEM Haul kit enables you to rescue users in difficulty. AXIS 11 mm Semi-static rope with sew termination



I'DS

Self braking descender with anti-panic function.



PRO TRAXION Jamming pulley for hauling.



BUCKET 15-30-45L Freestanding canvas bag.

AXIS 11 mm Semi-static rope with sew termination offering excellent abrasion resistance.



Illustration courses

The illustrations that are composing this catalogue are for sale. They enhance your whole course. It could also be customized on demand. Available on pdf, ai, png, jpeg format.



in a clear manner.

of pictures on USB key.

Customized illustration of your game.

Don't hesitate to contact us !

Engineering office



In our engineering office, we design and develop new game modules to complement your courses.

We are also at your services to develop customized products according to your specific needs and infrastructure.

Our creativity is limited only by your imagination...



Tel. +33 (0)2 31 78 82 76 Contact@spsfilets.com 15 rue Ampère 14120 Mondeville France





www.spsfilets.com

