



Contents

07 18

Construction of your course

Game modules 19 137

138 153

Zip-line games

Complementary games

154 158

159 175

Accessories

Anchoring solution Kujanak 176 182

Our know-how



In our workshop we provide you with our know-how, associated with great rigour, allowing us to master every stage of the manufacturing process.







Proud member of










Crimping workshop







The crimping technology gives an unequalled finish and a better life-time.

It also offers high-end elements with more color choices within your aerial rope courses.

Please feel free to contact us!



Type of wood

We supply a "ready for use" range of woods which comes from French forests and gives you the choice of wood's variety for your constructions.



- 1 Sustainable chestnut wood (+20 years). EN 350-2 Class 4 Standard according to NF EN 335-2. Chestnut wood is an environmental-friendly alternative against chemically treated wood. It does not need particular treatment/facility at the end of its life.
- 2 Sustainable larch wood (+20 years). EN 350-2 Class 3 Standard according to NF EN 335-2. Larch wood is a natural wood which does not need preservation treatment.
- 3 Autoclave Class 4 wood chemically treated EN 351-1 Class 4 Standard.

Make up your tailor-made obstacles easily

Thanks to our range of possibilities, bring some personality, colors and fun to your courses.

Wood engraving technic

on CTBX exterior plywood via digital control.














Wood



Please feel free to contact us!

Discover also our alternative materials

New materials for new play modules, let's create together your future circuits with these innovative materials.

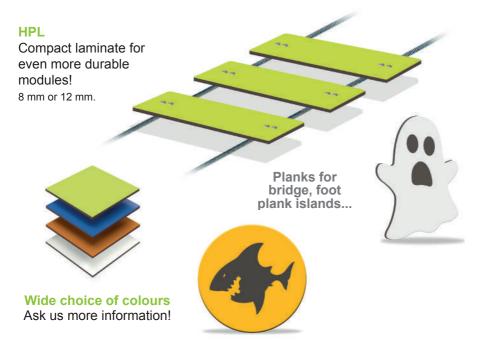






recycled plastic UV and weather resistant.



Please contact us for delivery times!

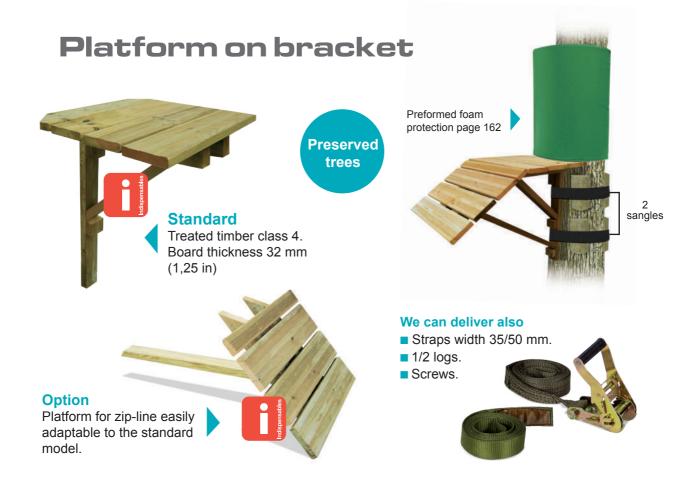

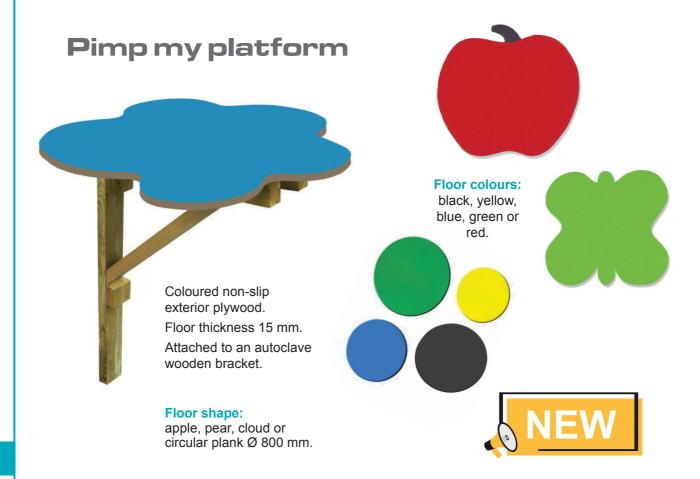

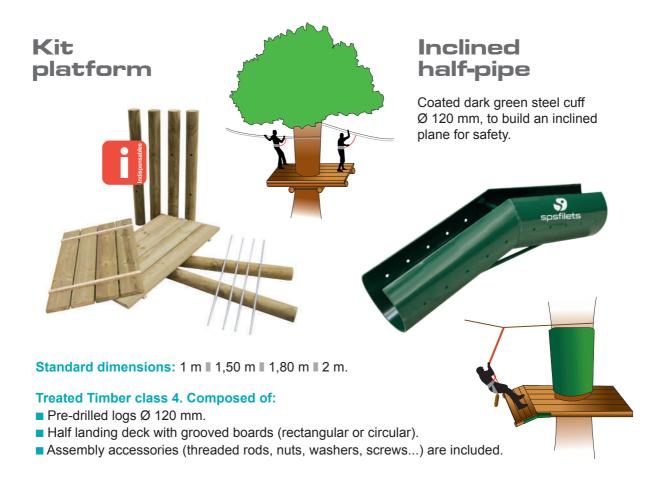

Wooden accessories



Sleeved sling

Galvanized wire cable Ø 12 mm 7 x 19 mm equipped with 1 thimble and large opening at one end + plastic sheath at the other.



Vertical access for platform

Galvanized steel cable Ø 12 mm, 7 x 19. Custom-made. Thanks to its "cob" system, it allows to stop the user in case of fall before he touches the ground. Standard NF CE 15567-1.


- Replaces a stop-fall.
- Doesn't require maintenance.
- Improves the fluidity at the start of the course.


Allows to secure the access of your elevated platforms.



Equidistance barb: children: 40 cm | adult: 50 cm.

Adjustable spacer bar

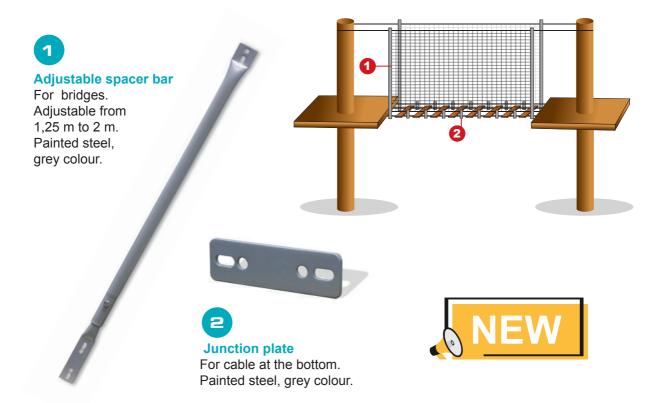

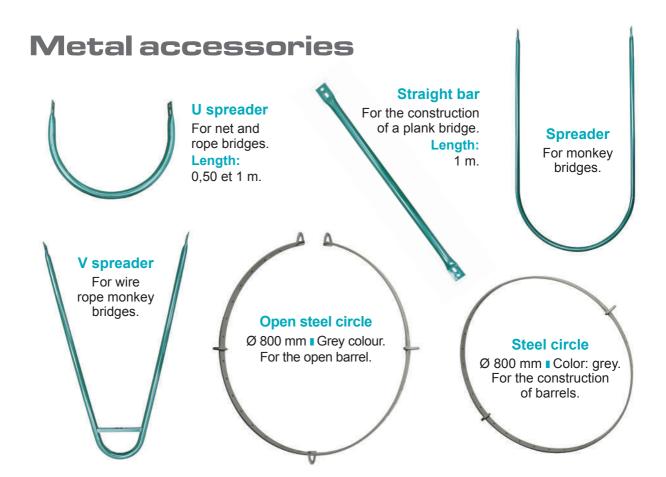

Wire cables and hardware



Galvanized steel wire rope (steel core)

Ø	Quality	Breaking strength	Construction
10	1960 N/mm2	7233 kg	7 x 19
12	1960 N/mm2	10400 kg	7 x 19



Non rotating steel cable (steel core)

Ø	Quality	Breaking strength	Construction
12	1960 N/mm2	9437 kg	19 x 7



Wire rope tighteners CE Ø 8 | 10 | 12 mm.







High resistance shackle Ø 10 mm to 32 mm.



We also supply



Wire rope tightening bolts Ø 12 mm.

Bulldog wire rope tightener.



Thimble Ø 10 to 20 mm.

Quick links
Simple to large opening
Ø 8 to 14. CE



Nylon cap nuts

Ø 8 mm for wire rope tightener Ø 10 mm Ø 10 mm for wire rope tightener Ø 12 mm.

Packaging: 100 or 1000 pieces.







DELTA link Ø 8 to 14 mm. CE

Zinc cap nuts
M8 ■ M10 ■ M12.



The game modules are supplied with accessories and packed in small packets.



Lifting and handling material

Pliable unwinder

Pliable unwinder for cable drum. 100 lm or 500 lm.

Doesn't take up a lot of space: pliable.

- Length: 530 mm.
- Width: 561 mm.
- Weight: 12 kg.



Block and tackle

It has been designed for hoisting, traction and stowage works in any technical elds. 250 kg -500 kg - 1500 kg.



Tubular sling

Length: 1 m 1,5 m - 2 m - 2,5 m. Resistance: 2 T. Possibility of colour brown and black on request.



Full wire rope-gripper with shackle. Capacity 380 kg for 7 to 15 mm cable or wire rope.



Wire-strainer

Light, easy to handle and small size. Capacity 600 kg for 7 mm to 15 mm cable.



CONI - KLAM

Wire rope gripper in conical shape Load: 2T from 10,50 mm to 14 mm cable.



Portable system

to shrink caps and heat-shrinkable sheaths.





With 2 gas cartridges you can retract 200 heat-shrink caps.





Heat-shrink end caps

Perfect to protect cable ends. For cable Ø 5 to 12 mm. Color black. Length: 7 cm. 4,50 cm (bag of 100 pieces).

Rope reel



The rope

In reels. Color: green, beige, havana, white, black.

Electric iron hot cut



Available for sale

Suspension ropes

We provide the suspension ropes your need to build your obstacles.

- Thimble eye and suspension ring at one end and hot-cutting at the other end.
- Thimble eye and suspension ring at each end.
- Thimble eye and suspension ring crimped on armed rope at one end and threaded rod with washer and nut at the other end.






Stairs

Easy and quick assembly

Build your own stairs to get to the platforms. Treated timber class 4. Length 60 cm. Plank Thickness: 27 mm.














Flying Net


Polypropylene Net, Ø 16 mm, 250 mm square mesh with a ring on each corner.



Level of difficulty

Climbing net knotted

Polypropylene knotted net Ø 16 mm meshes 250 mm square, with ring at each end.



Climbing net - Color black only

Ø 16 mm, 250 mm mesh..

Several dimensions available in stock

2 x 2* - 2 x 3* - 2 x 5* - 3 x 3*

6 x 3* - 4 x 4* - 5 x 5*. * height of the net



Level of difficulty




Finnish skittle

10 cm Ø log, wood autoclave class 4, beveled at one end. Stenciled on the beveled part. Length 40 cm. Delivered with accessories. Sold in packs of 12 skittles







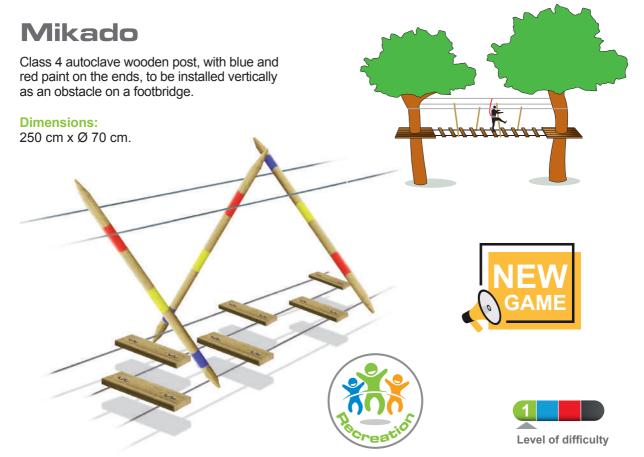



Mini-foot

Non-slip CTBX exterior plywood engraved and stained –thickness 15 mm. To be installed on 2 parallel cables and supplied with assembly accessories.

Dimensions: 55 x 25 cm. Wire cable spacing: 13 cm.



Tic Tac Toe

X or O in anti-slip CTBX birch plywood, engraved and stained. Thickness 15 mm. Installed on 2 wire cables. Supplied with assembly accessories.

Wire cable spacing: 30 cm.







Level of difficulty

Domino's footbridge

Planks in form of Domino's, in CTBX birch plywood, non-slip, engraved and stained. Installed on 2 wire cables. Supplied with assembly accessories. Set of six dominos.

Dimensions: 70 cm x 39 cm. **Wire cable spacing:** 30 cm.






The Moon

Three quarter steel tube to install vertically in staggered rows. Installed on 2 wire cables.



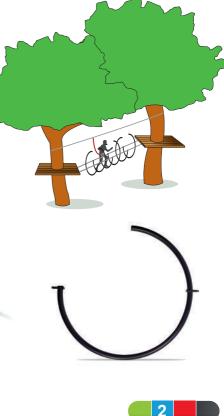



Level of difficulty




Wooden staircase

Wood plateforme made of autoclave class 4 wood, composed of 2 \emptyset 100 mm logs and 3 graved planks. Dimensions: 0,50 m x 0,70 m.

Flying square

Made of wooden square rafter 90 x 90 mm, autoclave class 4. Dimensions: 0,60 x 0,60 m. With quick link M6 Large Opening.

Suspension sold separately and to be mounted by yourself.








Threaded frame

Made of autoclave class 4 board, equipped with knotless 45 mm black polypropylen net. Dimensions: 0,60 m x 1,50 m.

Walking square

Made of 90 x 90 mm wooden square rafter. To be blocked with cable clamps (not supplied). Length: 0,60 m.

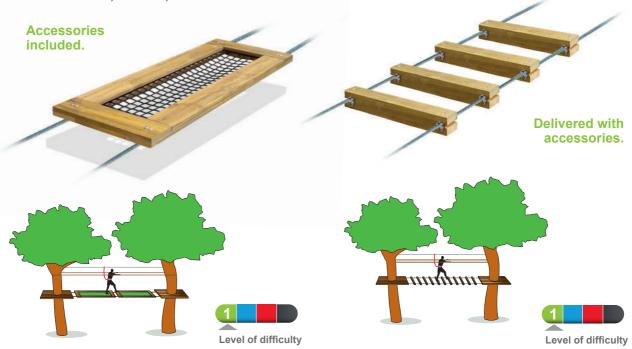




Elastic plank

Made of grooved board, thickness 36 mm, autoclave class 4. With self-assembly accessories. Width: 165 mm. Length: 1m.

Surf climbing

Made of grooved board, autoclave class 4. Dimensions: 1,50 m x 165 mm.

Thickness: 36 mm.

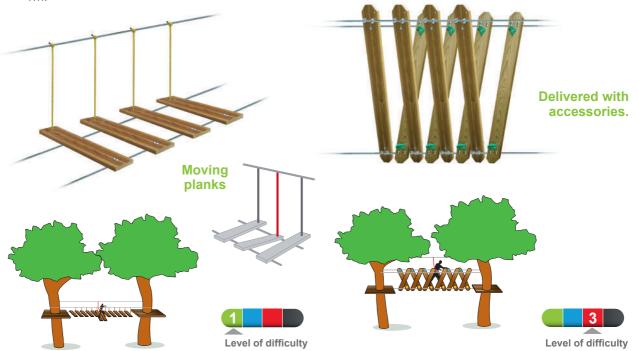





Made of Ø 20 mm rope made of dark green polyethylene. equipped with thimble eye and suspension ring at each end and locked with 3 knots with ring. Length: 3 m.

Crossing rope

Made of dark green rope Ø 20 mm in polyethylene, equipped with thimble eve and suspension ring at each end, to be attached on a cable. Length: 1 m.

Spacing: 0,56 m.








Crossing rope

Made of dark green rope Ø 20 mm in polyethylene, equipped with thimble eye and suspension ring at each end, to be attached on a cable. Length: 1 m.



Level of difficulty

Hand rope

Made of Ø 20 mm dark green polyethylene rope, fitted with thimble eve and suspension ring at the top, a knot and a heatshrinkable cap at the bottom.

Length: 0,80 m.







Hammer

Made of wooden square rafter 90 x 90mm, class 4 autoclave. Installed on 2 wire cables. Height 1,80 m. Equipped with a counterweight.



Banana planks for bridge

Non-slip wood, banana form - length 500mm. Thickness: 15 mm.











Level of difficulty



Planks for bridge



Grooved wooden planks for bridge

Width: 145 mm.


Thickness:

27 mm.

Length: 500 mm.

Level of difficulty

Including assembly accessories (wire ropes spacing: 400 mm).

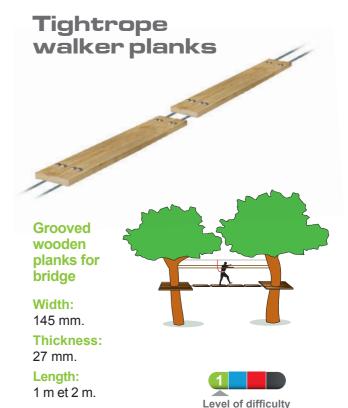

Including assembly accessories (wire ropes spacing: 100 mm).




X to walk

Made of 2 autoclave class 4 pine, assembled together in a cross shape. Supplied with assembly accessories.

Snake


Including 2 grooved wooden plank treated class 4, one measuring 1,145 m and the other measuring 2 m.

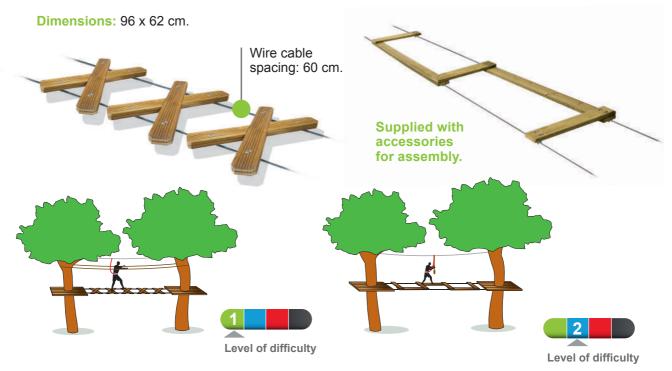




Dominoes

Wood planks treated autoclave class 4, assembled on bearing. Automatic motion.

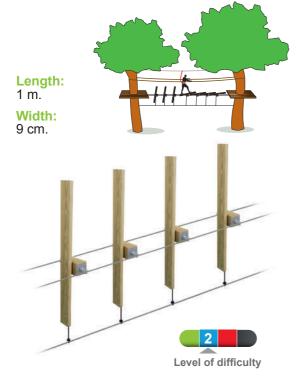

Stilt

Beech wood log Ø 100 mm, treated autoclave class 4. Length 0,66 m. Small walking log Ø 35 mm.



Assembly accessories are included.









U-form rope

Made of dark green rope Ø 20 mm made of polyethylene, equipped with thimble eye and suspension ring on each side of the end.

Color

Standard lengths:

2 m et 4 m.










Flying door

Made of 90 x 90 mm wooden autoclave class 4 square rafter. Width: 0,80 m. Height: 1,50 m.



Suspension sold separately and to be mounted by vourself.





Accordion log

Made of Ø 60 mm log, autoclave class 4, with 2 holes for the passage of ropes. Length: 0,50 m.



Level of difficulty





Hanging frame

Made of grooved board, autoclave class 4, with 4 holes for the passage of the ropes. Dimensions: 0.50 x 0.50 m.



Level of difficulty

Accordion board

Made of grooved board, autoclave class 4, width 145 mm. Equipped with 2 holes for the passage of ropes. Length: 1,10 m.



Level of difficulty





Hanging bridge 📥

Made of grooved board, autoclave class 4, with 4 holes for the passage of the ropes. Dimensions: 0,50 x 0,50 m.



Level of difficulty

Suspension sold separately and to be mounted by yourself.



The pawn

Hanging foam obstacle equipped with a suspension ring.

Standard color: green.





Foams length: 0,90 m.

Total height: 1,50 m.

Other colors on request.





Liana

Foam obstacle Ø 10 cm. Each end is closed and equipped with a fixing ring.





Slackline

Cruise Kit

- Intended as an introduction for all the family.
- Can be installed as you wish.

Width 50 mm. This strap gives you increased safety because itcan be installed at knee height, making it safe for beginners.

Length 15 m.

SLACKLINE STACKLINE ST

Other Slackline kits are available. To find out more, please don't hesitate to contact us.

The slide

Polyester Tarpaulin

PVC coated.

900 g/m2 with a slit on either side for insertion of the wire rope.

Hemmed with eyelets at top for attachment to platform.


Color: green.



Possibility to add eyelift on the length to secure thanks to a safety net.


Width: 1 m.



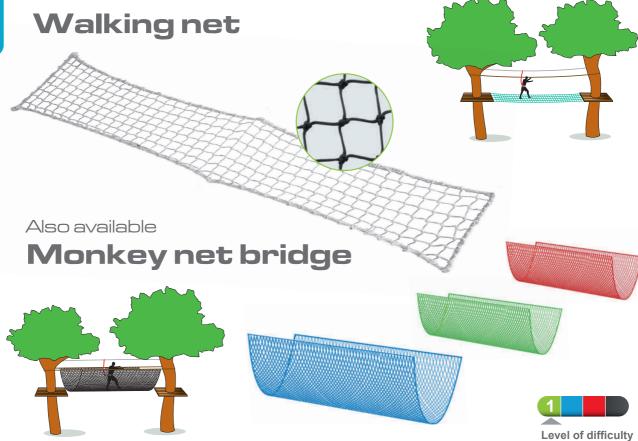



Braid: polyamide Ø 4,75 mm. Mesh: square, 50 mm knotted. Boltrope: Ø12 mm sewn all around the net. Color: white or black.



Braid: Polyester 4,50 mm.

Mesh: 50 mm knotted
square mesh, with
perimeter bolt rope
Ø12 mm, black.
Beige, blue, yellow,
red or green masscoloured net.

Braid: Polypropylene 5 mm. Mesh: 45 mm knotless mesh. White perimeter bolt rope Ø 10 mm, sewn around the edge. Net colours: blue, black, green, beige.

Multicolour net: use for indoors only.

Braid: polyamide Ø 5 mm. Mesh: square, 30 mm knotless. Boltrope: Ø 10 mm color white sewn all around the net. Color: beige.





Option strop with thimble

Multi-purpose and easy assembly. Standard length 30 cm. Color white, black.

Option double floor






Climbing net knotted

Meshes: knotted square mesh.

250 mm: Ø 16 mm.300 mm: Ø 20 mm.

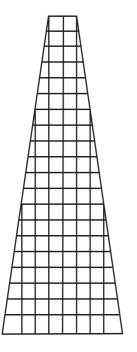




Different net shapes: rectangular - trapeze - circular.

Ropes: polypropylene, textured polypropylene, armed polypropylene.

Colors: green, blue, yellow, beige or havana.

With ring at each corner angle.

Option: peripheral rope for fixing the net.








Kit chimney

Wooden square frame, with black non-slip exterior plywood half-bearing surrounded by 50 mm mesh netting. Kit for self-assembly.

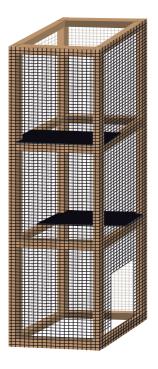

Net colours:

black, white, yellow, blue, green or red.










Wood chimney

Made of autoclave class 4 wood. Composed of modules 115 cm x 78 cm x 99 cm high. Pre-assembled,

to be fixed to the other module every meter.

Bottom, intermediary and bottom module supplied.







The chimney

Rope Ø 16 mm

- Square mesh 250 mm.
- Equipped with a half landing every meter.
- In rope Ø 12 mm, mesh 100 mm, attached in a staggered fashion. Color: black.
- Ø of the chimney: 800 mm. 1 m - 1,20 m on request.
- Colors: green or beige.

Supplied with half landing.





Safe

vertical

Standard

Rope ladder

Beechwood bar Ø 30 mm and rope Ø 16 mm

■ With thimble and suspension rings at both ends.



Color of the suspension rope green, beige, havana, blue, yellow or black.



Tarzan jump

Polypropylene textured rope Ø 30 mm.


- Thimble and suspension rings at the top.
- Reinforced grip at the bottom.

We can fix guides onto the rope for the implementation of safety measures.

Standard length: 3 m. Additional meter on request.





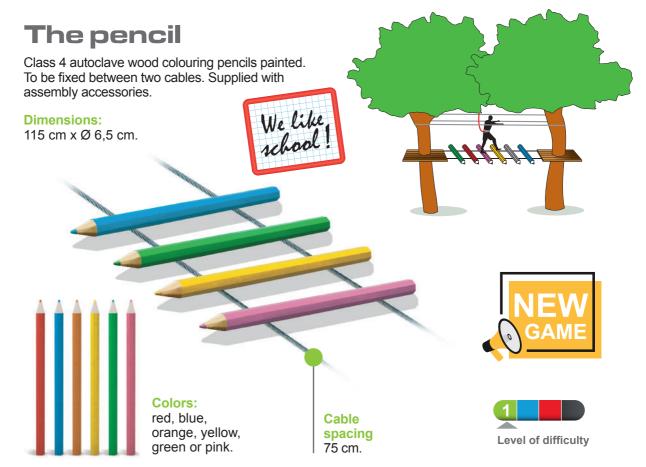



The pastel

Ø 100 mm round post, in painted wood. To be fixed between two cables. Supplied with assembly accessories.

Dimensions:

115 cm x Ø 9,5 cm.





Colors:

red, blue, orange, yellow, green or pink.


Cable spacing 75 cm.






Level of difficulty



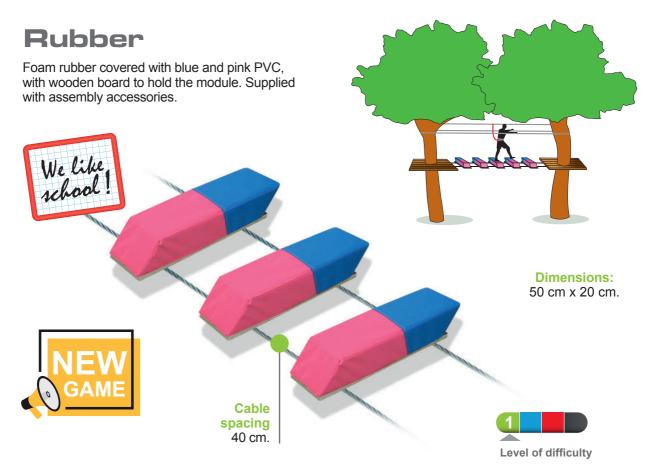



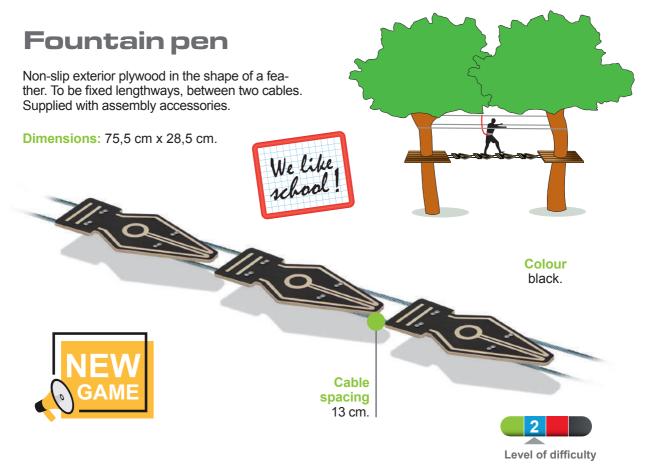




Multiplication tables

Exterior plywood coloured non-slip multiplication boards. Choice of 9 multiples. Supplied with assembly accessories.

Dimensions: 100 cm x 50 cm.





3

3 X 2 = 6 3 X 3 = 9 3 X 4 = 12 3 X 5 = 15 3 X 6 = 18 3 X 7 = 21 3 X 8 = 24 3 X 9 = 27 3 X 10 = 30

Colours:

red, blue, yellow, green, or black. Colour is determined by board.

Cable spacing 40 cm.








Hoops

Ø 34 mm metal tube hoop with 4 attachment

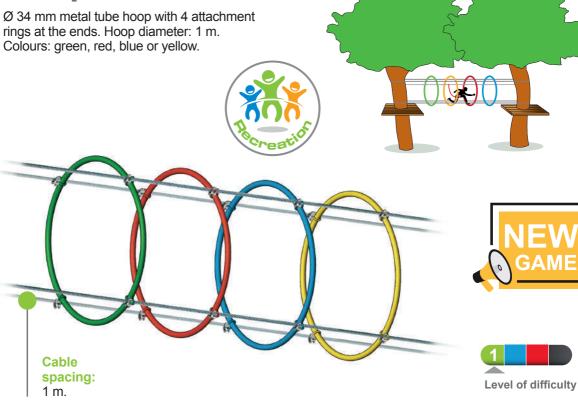




The beehive

Yellow non-slip exterior plywood, engraved and stained, thickness 15 mm. Supplied with mounting accessories.

Distance between cables: 30 cm.










Flying plate

Wood frame, Class 4 autoclave, 4 cm thick, with a coloured non-slip exterior plywood disc, fixed on 2 \varnothing 16 mm black metal reinforced ropes. To be installed on two cables. Supplied with mounting accessories.

Dimensions: 70 cm x 70 cm.



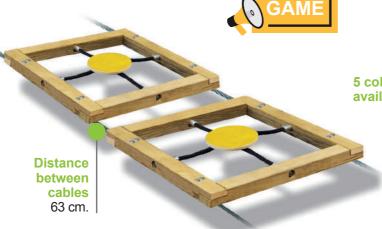






Big foot

Foot-shaped non-slip oor, attached to 2 logs Ø 100 mm. Positioning of 2 cables parallel to the left and right of the game module.

Running log

Log Ø 120 mm.

- Treated timber class 4.
- Equipped with ball bearings and rings for attachment to cable support.

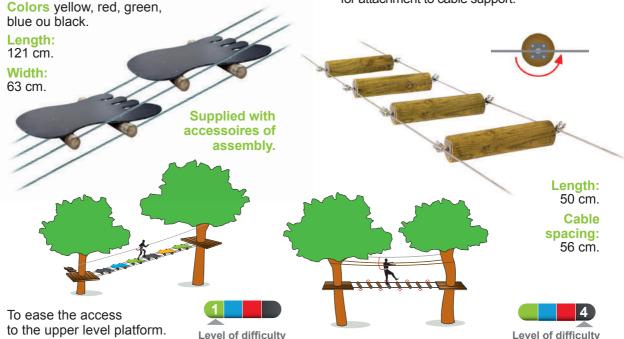




Pirogue bridge

Concave plank, treated autoclave class 4, 36 mm thickness, to put on 2 cables. Each plank comes with 4 wire rope tighteners.

The piano

Made of autoclave class 4. Equipped with a counter-weight with a design of piano.

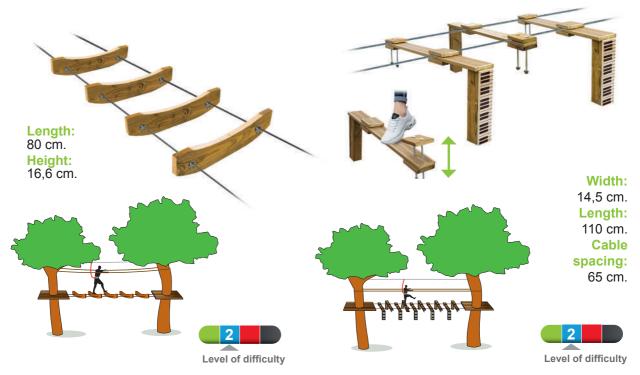




The pommel horse



This kit consits of:

- 1/2 circle Ø 500 mm.
- 10 pre-drilled planks autoclave treated, class 4. Length: 1 m.
- Comes with the required assembly accessories.





Moving bridge

2 m wood element composed of:

- 4 straps width 50 mm.
- 2wood logs Ø 100 mm
 - + threaded rod Ø 16 mm.
- 2 fixation rings at each end.



Sewn strap around the threaded rod.








Colorful plank footbridge


Red, Yellow, blue, green, black non-slip exterior plywood birch planks. Thickness 15 mm. Dimensions: 500 mm x 145 mm.

Colorful Chinese footbridge

Red, Yellow, blue, green, black non-slip exterior plywood birch planks. Thickness 15 mm. Dimensions:

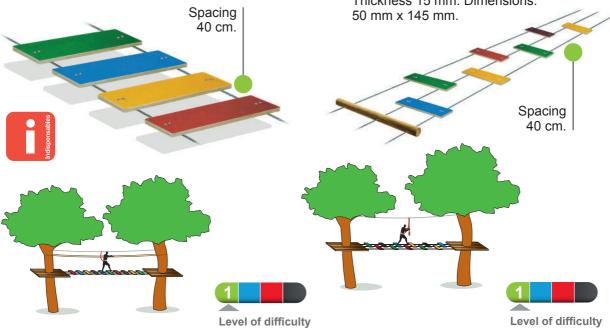



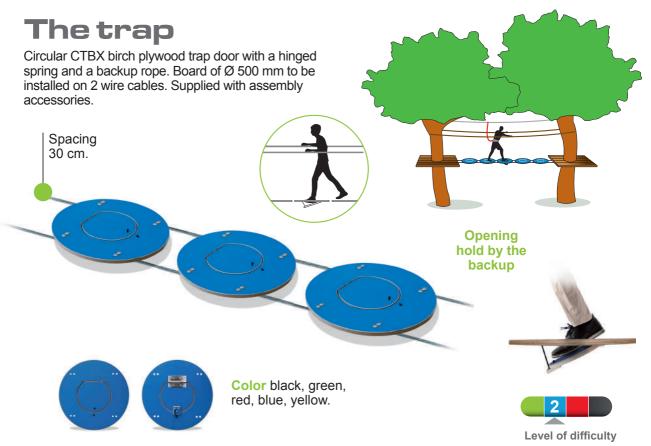



Short hops

2 logs Ø 100 mm.

- Treated Timber class 4.
- Equipped with a non-slip disc Ø 600 mm.
- Necessary assembly accessories.





Hand rope

textured polypropylene Ø 20 mm with thimble and suspension ring at the top and a reinforced grip at the bottom.

Discs colors

green, black, blue or yellow.





Fun islands planks

These wooden planks are a fun and educational game designed to enrich children's knowledge by discovering the forest: animal tracks, foliage, birds, etc...



Squirrel


Description

non-slip exterior plywood, thickness 15 mm

 \varnothing of the plank: 500 mm

To fix on 2 parallel wire rope.

With assembly accessories.



Wire cable spacing 30 cm.



Laser engraving on CTBX wood.





Discovery

The World of Wizards



Ocean

































































Birds













































































Footprints


































Broken planks

Made of CTBX plywood, engraved and stained, thickness: 15 mm. The crack is engraved. To be placed on 2 wire cables.

The Puzzle

Board made of CTBX exterior plywood in shape of piece of puzzle to be fixed on 2 wire cables including assembly accessories. Colors blue, black, green or yellow.

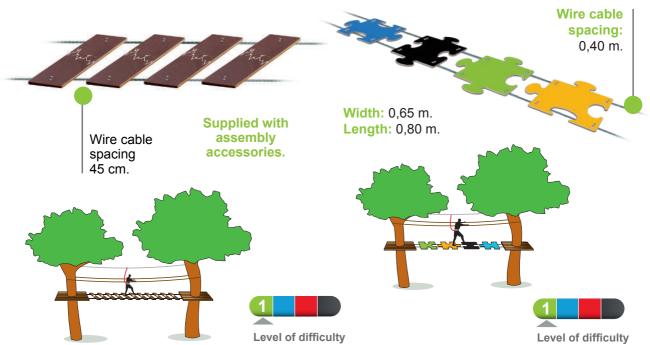



Halloween Collection

Plank made of engraved and varnished non-slip exterior plywood supplied with assembly accessories. The collection is currently composed of **5 elements**: bat, pumpkin, bone, ghost, skull.

Smileys


Smiley designed from yellow or red CTBX birch plywood. Non-slip board, engraved, painted and stained. Installed on 2 wire cables. Diameter of the board: 500 mm. Spacing 30 cm.





Candies


Collection of candies, made from colorful, engraved, painted and stained non-slip exterior birch plywood. Thickness 15 mm. Installed on 2 wire cables, supplied with assembly accessories.



Level of difficulty

Chocolate planks

Non-slip exterior black plywood, engraved and stained, thickness 15 mm. To be installed on 2 wire cables. Supplied with assembly accessories. Dimensions: 50 x 60 cm.





The slate

Class 4 autoclave wood frame with non-slip exterior plywood in the middle. Supplied with fixing accessories.

Dimensions: 49,50 cm x 35 cm.







Can be used as a suspended or walk-on module

GAME



Suspension ropes length: 1 m 2 m 2,50 m.



Cable spacing



The Waffle

Module made of 30 mm class 3 Okoumé plywood, rectangular shape with hollowed-out grid.




Supplied with Ø 16 mm suspension ropes in polypropylene or textured polypropylene.

Length suspension rope: 1 m ■ 2 m ■ 2,50 m.



Supplied with assembly accessories.





The goki plank

Coloured non-slip exterior plywood, 15 mm thick, with geometric inserts. Equipped with coloured suspension ropes 3m long

Dimensions: 61 cm x 118 cm.



Cable spacing 50 cm.

















Double walking log

Wood module, Class 4 autoclave, equipped with two \varnothing 120 mm logs, length 300 mm, and a grooved board, length 550 mm, 27 mm thick.





Dimensions:

Length 55 cm. Width 15 cm. Height 65 cm.

Available Rope lengths: 1 m
1 2 m 2,50 m.



Equipped with 4 coloured Ø 16 mm suspension ropes.





Hanging I's Necessary accessories to attach the logs together. Level of difficulty **Hell's** crossing Equipped with

Moving log

Standard lengths: 1,50 m or 2 m.






Log trapeze

Equipped with 2 suspension ropes Ø 16 mm.

Log: 0,66 m, 1,33 m or 2 m, for front or side positioning.







Log Ø 100 mm. Treated Timber class 4. With thimble and suspension rings at the top. Colors green, beige, havana, blue, yellow or black. Suspension lengths: 1 m ■ 2 m ■ 2,50 m.

3 suspension ropes

Ø 16 mm.

Level of difficulty



Hanging skittles

Equipped with 2 suspension ropes Ø 16 mm.

Suspension lengths:

1 m ■ 2 m ■ 2,50 m.



Log Ø 100 mm

Treated Timber class 4. Log length: 0,66 m. With thimble and suspension ring at the top. Ropes colors: green, beige, havana, blue, yellow or black.



Colored hanging plate

Disc Ø 400 mm

- Non-slip exterior birch plywood.
- Textured polypropylene rope Ø 20 mm with thimble and suspension ring at the top.

Suspension lengths: 1 m ■ 2 m ■ 2,50 m.



Colors black, green, red, blue and yellow.



Standard

Hanging anchors

Log Ø 100 mm

Treated Timber class 4. Log length: 0,66 m. With reinforced loop and suspension ring at the top. Ropes colors: green, beige, havana, blue, yellow or black.



Equipped with suspension rope \varnothing 20 mm.

Suspension lengths:

1 m **1** 2 m **1** 2,50 m.



Level of difficulty

Vertical log

Log Ø 120 mm

- Treated Timber class 4.
- Step attached to the log.
- Armed suspension rope Ø 16 mm with thimble and suspension ring at the top.
- Colors green or beige.



Log length: 1,80 m.

Length with suspension rope: 2,50 m.





Flying carpet

Grooved planks

Treated Timber class 4. Equipped with suspension ropes Ø 20 mm. With reinforced loop and suspension rings at the top (to be assembled in a sawtooth fashion).

Tibetan bridge

Made with a walking rope in textured polypropylene \varnothing 30 mm, equipped with suspension ropes every 0,5 m textured polypropylene \varnothing 20 mm.





Suspension lengths:

1 m ■ 2 m ■ 2,50 m.

Colors green, beige, havana, blue, yellow or black.

With reinforced loop and suspensions rings.

Thickness: 27 mm. Width: 145 mm.

Full length: 1,50 m.

Length between ropes: 1,30 m.







Hanging crosses

Log: length 1,33 m, Ø 100 mm.

- Treated Timber class 4.
- Equipped with 4 suspension ropes Ø 16 mm.
- With reinforced rope and loop suspensions at the top.

Suspension lengths:

1 m ■ 2 m ■ 2,50 m.



Indispensables

Colors

green, beige, havana, blue, yellow or black.



Hanging bridge






The net tube

Net tube

Equipped with a steel circle Ø 800 mm every meter.



Different meshes available:

- Polyamide, mesh 50 mm.
- Colors white or black.
- Polyester, mesh 50 mm.
- Colors blue, yellow, green, beige or red.
- Polyethylene, double mesh 70 mm.
- Color green.
- Rope, mesh 250 mm.
- Color green. or beige.



Level of difficulty



Swing seat

Consists of 2 steel structures, grey color. Supplied with 4 grooved boards. Length: 1,50 m.



Possibility to buy only the structure.



Option:

or more comfort


mattress (pad).

yor can add a

Dimensions of structure:

1 m high by 0,80 m wide.





Comes with assembly tools.





Level of difficulty



The honey spoon

Obstacle consisting of a \emptyset 100 mm autoclave class 4 post with a \emptyset 250 mm honeycomb larch base and a \emptyset 16 mm reinforced suspension rope crimped at each end, equipped with a thimble and fixing ring.











Balance pole

Steel bar Ø 34 mm

Equipped with 2 suspension ropes \varnothing 16 mm. Connected at the top with a ring.

Colors

green or beige.

Sold separately, either element.

Pulley with shackle



Tandem Speed Pulley Petzl







Jungle tunnel

Animals made of CTBX plywood, thickness 15 mm, engraved and stained. Path dimensions: 90 cm x 70 cm. Total dimensions: 1,22 m x 2,00 m.



Colors: blue, yellow, green,red or black.







The Enchanted tunnel

Exterior birch plywood for outdoor use, fixed on 4 wire cables. Dimensions: 1,10 m x 1,10 m, thickness 15 mm.


Available different shapes

Rabbit, apple, pear, turtle, leaf, cloud, acorn...



Sold separately

Grooved wooden plank in autoclave class 4 pine Length: 1,10 m. Cable spacing: 0,90 m.







Open barrel

Circles Ø 800 mm with opening at the top to allow the continuous lifeline to pass through. Class 4 autoclave boards, pre-drilled to length.





1 m - 1,50 m 2 m - 2,50 m.







Barrel option

A mattress can be added for more comfort.





Barrel


Composing:

Circles Ø 800 mm. Wooden slats, treated timber class 4, pre-drilled with regardsto length required.



The wave

Wave bridge, made with steel plate curved covered with gray plastic and fixed on grooved boards with bolts.



The gateway is equipped with a suspension ropes, Ø 16 mm, color green or beige. **Childrens course**: adujstable suspension ropes 1,50 m to 2 m. **Adults course**: adujstable suspension ropes 2,50 to 3 m. Bridge witdh: 0,50 m.





Uneven circles

Steel circle Ø 1 m with a 30 cm tube welded to it.

Equipped with 2 plates welded to the circle for attaching the wire rope.


To be installed in a staggered fashion.





Bascule bridge

Wooden module treated class 4, lenght 2 m, made with a grooved wooden plank, attached to a hinge galvanized steel.



Supplied with assembly accessories.








Level of difficulty



The Licorice Path

Made of exible rubber material width 250 mm, equipped with suspension ropes Ø 16 mm with thimble eye and suspension rope.



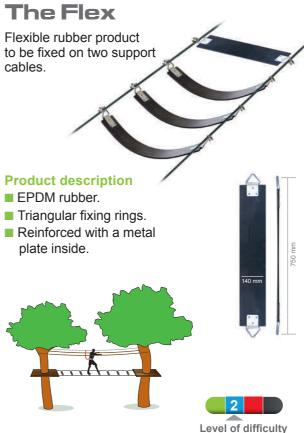



Hanging bridge

Apple and butter y shape

Non slip exterior birch plywood. Thickness: 15 mm. Supplied with 4 suspension ropescolor green or beige in rope Ø 16 mm and thimble and suspension rings at the top.





Wooden island planks

Shape: apple, pear, fish, rabbit, turtl, leaf, cloud, acorn.

Non slip exterior birch plywood. Thickness: 15 mm. With assembly accessories.









Handing bridge and wooden island planks: colors red, green, blue, yellow or black.




Rope loops

Rope Ø 16 mm

Standard length: 0,56 m.

Colors beige, yellow, blue or black.

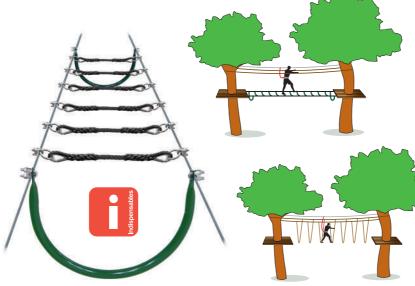

U-form rope

Rope Ø 20 mm

Reinforced suspension loops and rings at both ends.

Colors beige, blue, yellow or black.




Level of difficulty





The "ravioli"

PVC ball enclosed in a black ravioli-shaped walking net. Net equipped with a ring at each corner. Not Supplied with rope tightener for assembly. Dimensions: 75 cm x 75 cm.




Level of difficulty

Pika Pika

A \varnothing 300 mm yellow sphere with two handles equipped with 2 polypropylene suspension ropes \varnothing 16 mm with thimble and suspension ring.

Length of suspension ropes: 2 m.







The sailor bridge

«Polyform» boat fender, length 60 cm. The fender is assembled on 2 x Ø 16 mm polypropylene ropes, color green or beige, with thimble eye and ring at each end




«Polyform» boat fender, length 1 m. The fender is equipped with a Ø 12 mm elastic rope + a suspension ring at each end.



The ship's boy swing



«Polyform» boat fender, length 1 m. The fender is equipped with 2 x Ø 20 mm polypropylene ropes, color green or beige, with a thimble eye and ring at the top and a knot at the bottom.

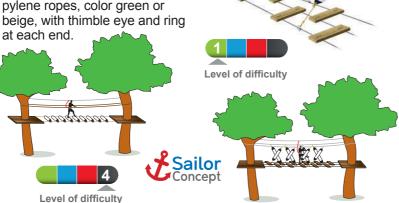








Color of the suspension rope: green, beige, havana, black, blue or yellow.



Rope rings

Thimble and suspension rings at the top.





Ring Ø 200 mm at the bottom for hands

- Suspension rope Ø 16 mm.
- Colors beige, havana, blue, green, yellow or black.





Hanging stirrups

Thimble and ring suspension at the top.



Ε 2,2

- Suspension rope Ø 20 mm.
- Colors beige, havana, blue, green, yellow or black.



Level of difficulty




Climbing planks



Level of difficulty

Coco Tarzan

Polypropylene Monkey \pm fist ball \varnothing 150 mm, equipped with a suspension rope \varnothing 16 mm with thimble and suspension ring at the top.

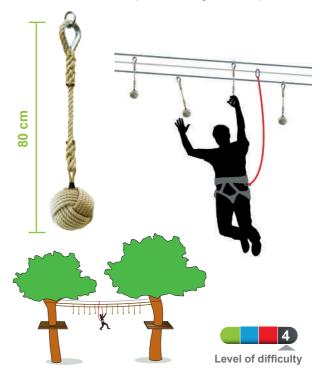



Foot obstacle

Foam obstacle covered with a PVC tarpaulin and equipped with Velcro to attach the obstacle to the plank.

Thickness plank: 27 cm.

Length: 90 cm. Width: 27 cm.

Comes with the required assembly accessories.



Smiley

Foam obstacle covered with a PVC tarpaulin, equipped with fixing eyelets in the upper part. The smiley is an adhesive sticked on the tarpaulin.





■ Dimension: 1 m x 1,50 m.






Suspended fry

Foam cylinder covered with a green PVC protection, provided with 4 hanger straps sewn on a ring.

Standard color: green.



Foams length: 1,50 m.
Colors other on request.



Level of difficulty

TACOTAC

Foam obstacle with a density of 30 kg/m³ and is covered with a PVC tarpaulin. Equipped with a polypropylene (synthetic hemp) suspension rope Ø 20 mm. Length 2,50 m.





Jungle tracks 2 modules to create different games. Round steel tube Ø 800 mm. Color grey. Steel bar (tube) straight or curved. Mesh net size 100 mm, without knots, black polythene. Rope size Ø 12 mm. Net without knots, diamond mesh. Straight module

Numerous forms available



Steel Structure

Customizable course. Possible to be sold per unit.



Planks for bridge

Grooved Plexiglas XT planks supplied with the fixing accessories.

Width: 140 mm. Thickness: 15 mm. Length: 500 mm.



Funambulist planks for bridge

Grooved Plexiglas XT planks supplied with the fixing accessories.



Level of difficulty



Glass Series

Chinese bridge "Glass Series"

Level of difficulty

Grooved and bolted plank in plexiglass XT to fix on 3 wire cables. Supplied with fixing accessories.

Option: 2 spreaders 1 m long with 3 drilled holes on edges.



Equipped with 4 suspension ropes Ø 16 mm With wire rope thimbles and suspension rings in the upper part.



« Glass » plank bridge

Grooved plexiglass XT planks, fixed to 2 rafters 90 mm x 90 mm.

Length: 0,65 m. **Width:** 0,63 m.

Length of suspension ropes: 1 m ■ 2 m ■ 2,50 m.





"Glass" barrel



This kit consists of:

Ø 800 mm rings. Pre-drilled Plexiglass XT slats. Length: 1 m.



Level of difficulty

«Glass» wave



Wave bridge, curved, made with steel and covered with grey plastic, on which grooved plexiglass XT planks are bolted.

The gateway is equipped with a suspension ropes, Ø 16 mm, color green or beige. Childrens course: adujstable suspension ropes 1,50 m to 2 m. Adults course: adujstable suspension ropes 2,50 to 3 m. Bridge witdh: 0,50 m.

Pommel horse «Glass»

Kit consists of:

- 1/2 circle Ø 500 mm.
- 10 pre-drilled Plexiglas planks.
- Assembly accessories.





Speed cube

Wooden cube with coloured non-slip exterior plywood panels forming a speed cube to be fixed to two parallel cables. Supplied with mounting accessories.



















91



Dice

Cubes made of Okoume plywood panels painted white with black dots for the numbers.











Dimensions:

30 cm x 30 cm.

Cable spacing: 40 cm.





The bee cell

Tunnel made of 90 x 90 mm square wood and yellow bungee cords, diameter 12 mm. To be fixed with supplied wire rope saddles.












Halloween Footbridge

Printing on Okoumé plywood, thickness 18 mm. Ø 500 mm. Installed on 2 wire cables. Supplied with assembly accessories.



Mushroom Picking Collection

Black, red, yellow, green or blue mushroom made of CTBX birch plywood. Engraved, and stained non-slip planks. Installed on 2 wire cables. Supplied with assembly accessories.

Dimensions: around 65 cm x 85 cm.



















The Farm collection

Made of CTBX black plywood, stained and engraved, thickness 15 mm. To be installed on the wire cable. Supplied with assembly accessories. Dimensions change regarding the shape. Wire spacing:40 cm.

The tools of the farmer

Made of Okoume wood, thickness 40 mm, stained. Supplied with assembly accessories. Dimensions: about 75 cm x 96 cm.

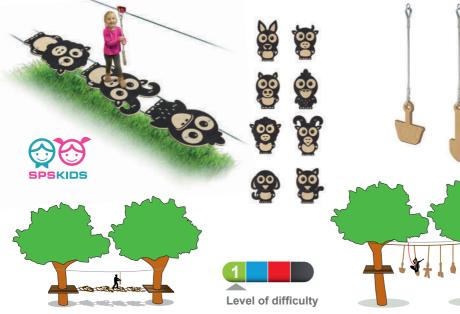



shapes: scarecrow

scarecrow pitchfork, basket, shovel, bucket.




Level of difficulty




Animal metronome

Animals made of CTBX plywood, thickness 15 mm, engraved and stained. To be mounted on swing wood rafter. To be assembled on 2 bottom cables. Everything is supplied to mount the element

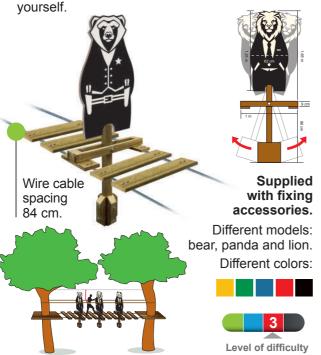

The Brick


Okoume wood, core made of popular covered with exterior wooden painting. To be fixed on 2 parallel cables. Assembly accessories included.

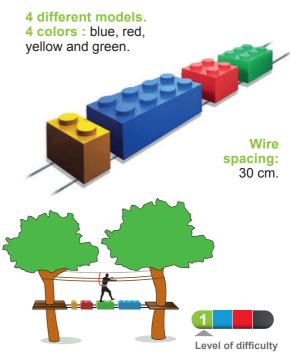



Savanna crossing

Island made of Okoumé, thickness: 18 mm, Ø of the plank: 500 mm. Supplied with assembly accessories. Recto/verso printing available as option.

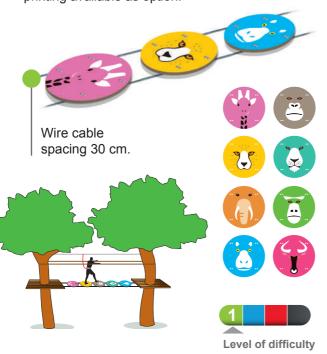

Little monsters

Island made of Okoumé, thickness: 18 mm. Dimensions: 1,02 m x 0,95 m. Recto/verso printing available as option.





Supplied with fixing accessoiries.



Level of difficulty




Flowers' path

Made of colored CTBX plywood, thickness 15 mm, engraved and stained. Dimensions: 0,50 m x 0,50 m. Supplied with assembly accessories.

Leaves path

Non-slip CTBX exterior plywood (yellow and green) engraved and stained thickness 15 mm. To be installed on 2 parallel cables and supplied with assembly accessories. Dimensions: 50 cm x 60 cm.

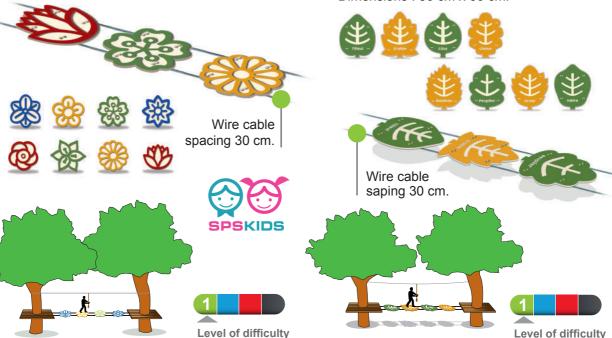




Hopscotch

Made of 10 elements of non-slip exterior plywood, 15 mm thick engraved and stained. Supplied with assembly accessories.

The crossing of the Knights

Shields are made of class 3 Okoumé plywood. To be fixed on 2 cables. Board supplied with fixing accessories.

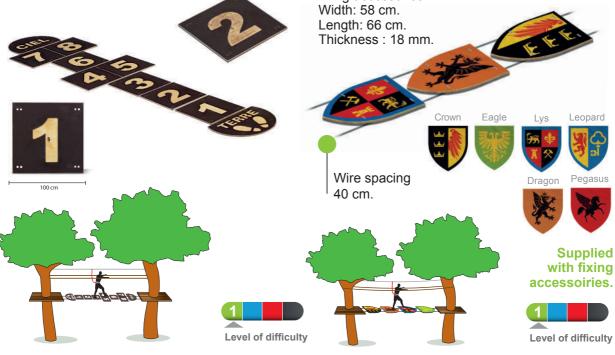



Moving and steady suspension ropes

Suspension rope made of elastic rope, in a tubular sling. Suspension rope made of polypropylene rope, in a tubular sling.



Choice of suspension ropes allows you to get:

- A double steady suspension rope.
- A moving rope on left side and a steady rope on the right side and vice versa.

The climber will discover the fun at the very last moment!!



Yo-yo

Larch Yo-yo class 3, with a \emptyset 30 mm PP or textured PP suspension rope, with thermo sheath, thimble loop and fixing ring at the top.



Length suspension ropes: 1 m 1 2 m 2,50 m.





Yo-yo dimensions: 26 cm x Ø 30 cm.






Spinning-top

Larch spinning top, class 3, suspended from a Ø 16 mm reinforced rope, with thimble and ring at the top.





Top dimensions:

37 cm x Ø 32 cm.










The little ball

Class 3 larch sphere, with painted cat's eye, suspended from a reinforced rope \emptyset 16 mm, with thimble and fixing ring at the top. Paint available on request: blue, yellow, red or green.





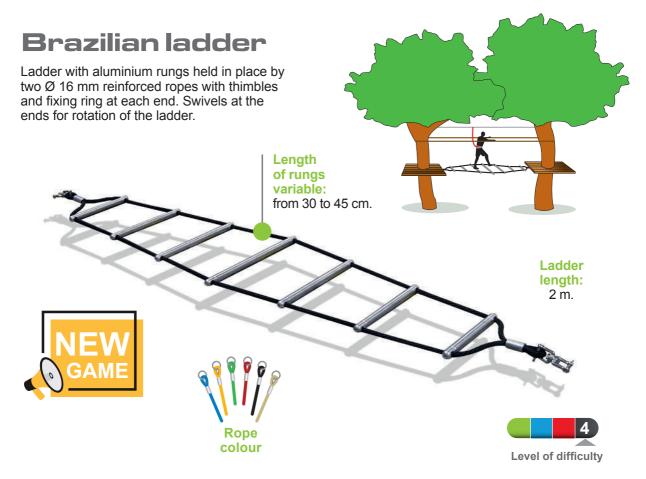




The Armed Stairs

Made of Ø 16 mm armed rope, crimped with a thimble and fixing ring. Equipped with a handrail and steps in autoclave class 4 wood. Module length 2 m overall, greatest height 3 m. Sold by the linear meter.

The Split

Made of \emptyset 16 mm armed rope, crimped with a thimble and fixing ring. Equipped with a handrail at mid-height and three autoclave class 4 wood turning logs. Length 2 m - 4 m - 6 m.

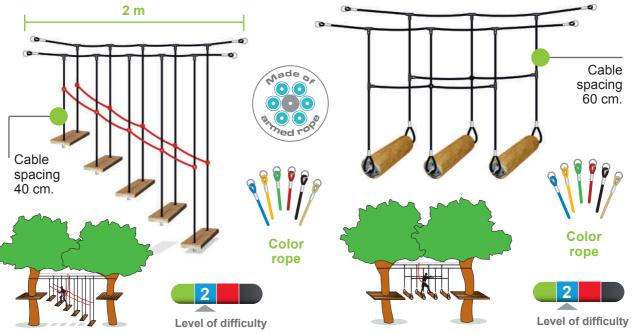




Armed steps

Made of Ø 16 mm armed rope, crimped with thimble and fixing ring. Equipped with autoclave class 4 wood steps arranged in staggered rows. Steps spacing: 50 cm. Sell to linear meter.








Color rope




Level of difficulty



The Path of 3 Ropes

In "U" shape, installed in single file with 30 cm between each "U". The first and last rope are installed at 50 cm from the start and 50 cm from the end. It is made of \varnothing 16 mm armed rope. Spacing 80 cm.






The armed rope chimney


Made of Ø 16 mm armed rope, 250 mm mesh, crimped with a thimble and fixing ring. The chimney is equipped with landings and half-landings in black, yellow, green, blue or red non-slip exterior plywood.

Rotating Ladder

Made of Ø 16 mm armed rope, crimped with thimble and 360° swivel hook. Equipped with green plastic rungs. Total height: 240 cm. Spacing: 40 cm.

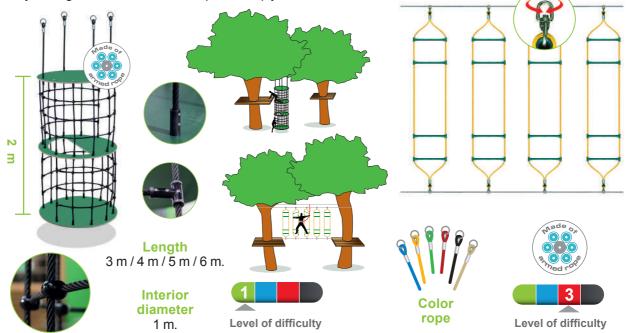



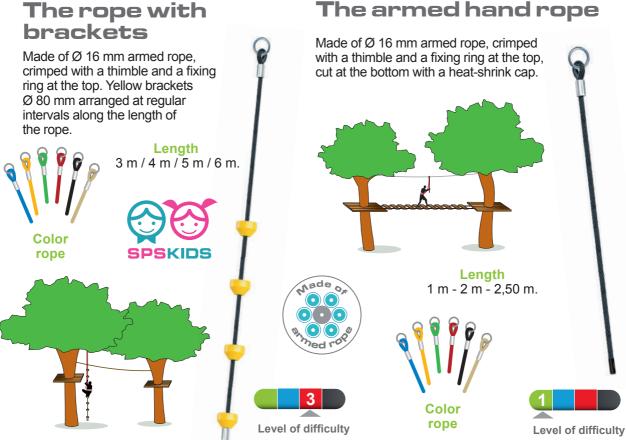




The sun

Circle Ø 1 m, equipped with 6 armed ropes Ø 16 mm. The ropes are crimped at each end and are equipped with a thimble and a suspension ring.

Climbing ring

Armed rope \varnothing 16 mm crimped at one end, with a thimble and a suspension ring. Equipped with yellow gym rings.



The circle and its ropes are fixed between upper and lower cables.



Level of difficulty




Length 2,50 m.





The star

Obstacle made of armed rope Ø 16 mm equipped with thimble and suspension ring with a central part made of grooved non-slip exterior plywood. Color red.

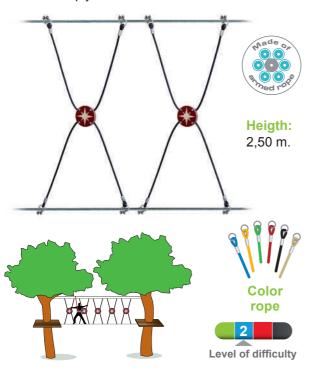

Zig Zag bridge


Made of grooved planks. Thickness: 36 mm equipped with armed ropes Ø 16 mm crimped with thimble eye and suspension ring.



Suspension rope 1 m.



Bridge width: 0,80 m. Bridge length: 1,50 m.






Color rope



Level of difficulty



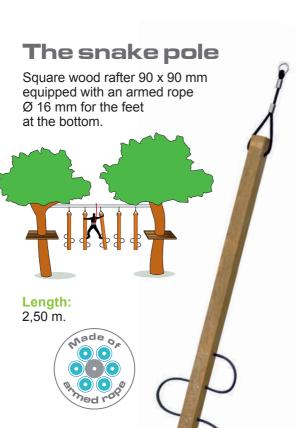

Level of difficulty

Rope Ladder Armed rope Ø 16 mm equippe

Armed rope Ø 16 mm equipped with reinforced PP rungs. The rope is crimped at each end and is equipped with a reinforced loop and a suspension ring.

Width: 400 mm.









Caving ladder

Ladder with 28 cm aluminium rungs, held in place by two Ø 16 mm armed crimped ropes, with thimble and fixing ring at each end.












Length: 4 m et 6 m, other dimensions on request.






Himalayan bridge

Made of Ø 16 mm crimped armed rope with thimbles and suspension rings, reinforced PP rungs. Equipped with a high and a low handrail.





Made of armed rope with a convex path. Green bar spaced of 40 cm from each other. Made of Ø 16 mm armed rope. Length: 4 m (effective length: 3 m).

Wire cable spacing 0,40 m.

Suspension height 2,50 m.


Width 400 mm.







Level of difficulty



Level of difficulty



The loop **TWIRL** Armed rope Ø 16 mm crimped **Hand rope** at one end, with a thimble and Armed rope Ø 16 mm. a suspension ring. Provided Equipped with with a Ø 16 mm rope stirrup a swivel hook. in the lower part. Suspension ring. Plastic handle. 360° rotation Made o Length: 2,50 m.

Color

rope

Level of difficulty

Color

rope

Level of difficulty




Rope bridge

Armed rope \emptyset 16 mm crimped at each end. Equipped with a thimble and a suspension ring.



U-form rope

Armed rope \emptyset 16 mm crimped at one end, with a thimble and a suspension ring.

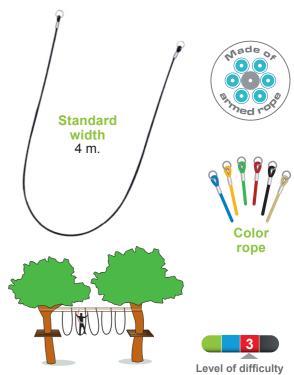



Suspended banana

Banana-shaped foam covered with yellow PVC sheeting, fitted with 4 suspension ropes sewn onto a ring.

Total foam length: 150 cm x 47 cm.






Level of difficulty



Coco Monkey

Polypropylene Monkey \pm fist ball \varnothing 300 mm, equipped with a suspension rope \varnothing 20 mm with thimble and suspension ring at the top.

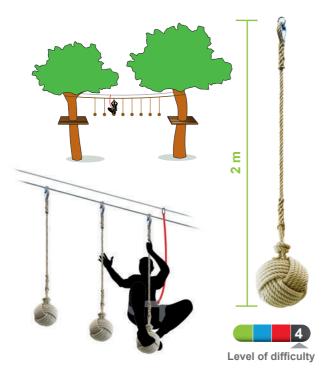




The Step

"Polyform" boat fender equipped with a suspension rope Ø 20 mm with thimble eye and suspension ring.

Length 2,50 m.







The Swing of the Captain

"Polyform" boat fender in arch shape equipped with 2 suspension ropes Ø 20 mm with thimble eye and suspension ring.

Color of the suspension rope

green, beige, havana, black, blue and yellow.












Cocoon

PVC Ball Ø 60 cm covered with a polyamide mass-colored net, braid 5 mm and mesh 25 mm. Color green.




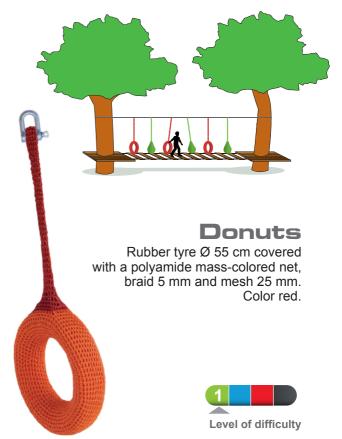



Color Bag

Sack made of rope \varnothing 16 mm. Diamond mesh: 150 mm. Sack \varnothing 600 mm, height 2,40 m equipped with 2 suspension ropes with thimble. Filled with colored foam cubes.




Wrecking Ball

Sack Ø 600 mm. Heigth 1,20 m. Rope Ø 16 mm. Diamond meshes 150 mm. PVC Ball Ø 600 mm.

Equipped with 2 suspension ropes with thimble.











Colored foam cubes or peanut balls sold separately.



Pirate swing

PP rope (140 x 140 mm) equipped with reinforced suspension rope (Ø 16 mm). Available in 3 lengths: 1,35 m, 1,85 m and 2,35 m. Suspension ropes have a V form.

Fisherman bridge

Rope Ø 100 mm, in textured polypropylene provided with 2 different lengths of suspension ropes fixed every 1,50 m.




Stainless quick links M6 large openning with large opening.
















2,50 m



Coconut swing

Braided Polypropylene swing length 60 cm equipped with two polypropylene suspension ropes \emptyset 20 mm with thimble and suspension ring. Length rope: 2,50 m.





The Tyre

Made of molded black polypropylene, equipped with 2 suspension ropes Ø 16 mm with thimble eye and suspension ring.



Length: 2,50 m.

Color of the suspension ropes

green, beige, havana, black, blue or yellow.



Climbing wall

Climbing wall made with planks class 4 and provided with inserts and with a set of climbing holds.



Module dimensions 2 m x 3 m.













Climbing fresco

Wall planks made of Okoumé wood, thickness 18 mm, dimensions: 1,22 m x 2,00 m. Wood printing. Supplied with a bundle of 30 climbing holds* and accessories. Option: customizable theme.




Wire cable spacing 1,80 m.

















Enchanted climbing wall

Wood structure, height 2 m, to fix on a hig-cable and on a low-cable. 2 plywood boards: one above and one below. Both are equipped with holds. Assembly accessories included.



1 - Hand and foot holds.

Climbing holds*

* Socket colors according to available stock.

2-Plank


Available colors red, yellow, blue or black.



Level of difficulty

Zebulon

Anti-slip disc \emptyset 300 mm mounted on a red spring. Spring is fixed to a floor \emptyset 600 mm.

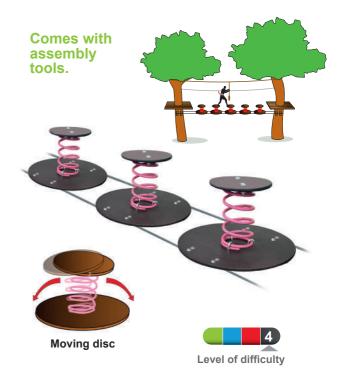



Jungle wall

Animals made of non-slip exterior plywood, thickness 15 mm, engraved and stained, to be fixed on 1 upper and 1 bottom cable. Dimensions: 1,22 m x 2 m. Form: Panda, Bear or Gorilla, to be specified. Supplied with assembly accessories.

Passage with holes for hands and feet. Wire cable spacing 1,80 m.



Colors: blue, yellow, green, red or black.



Ghosts

Suspended wood ghost head. Equipped with 2 galvanized chains. Plywood thickness: 15 mm.



Colors black, yellow, green, blue or red.



Option

Galvanized chain to attach the different modules together, supplied with quick links.



Length: 1 m.






Commando net

Net made of 35 mm polyester straps, 150 mm mesh. Equipped with suspension rings every meter. It can be used either as a climbing net or walking net.

The cradle

Net tunnel, mesh 50 mm, mounted on a tubular steel structure.

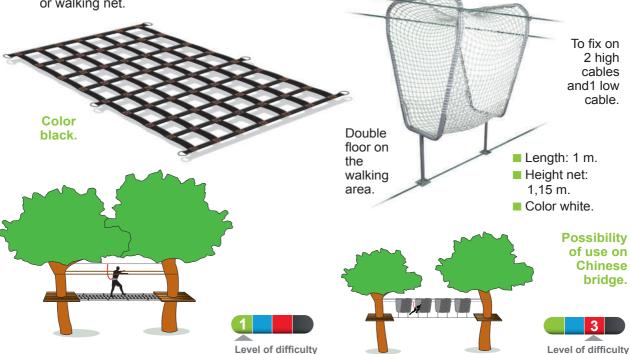




Infernal roll

Roll made of polyethylene high resistance equipped with protection mattress, thickness: 20 cm with suspension ring. Color: red.



360° rotation



Length:

1,11 m.

Diameter:


0,53 m.

Cable spacing: 1,20 m.



Speed wheel

Cleaned tyre equipped with 2 discs made of red grooved non-slip exterior plywood mounted on a rotating axis. To be on 2 wire cables.

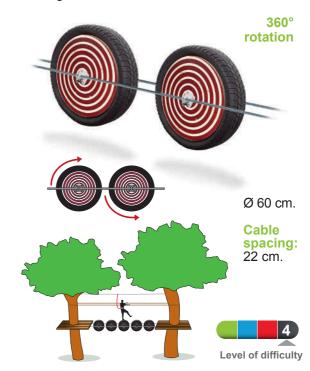




The Basin

Genuine wooden basin mounted on 2 connector boards equipped with a rotation axis. Fix on two support cables.



Dimensions

Basin height: 35 cm. Basin length: 66 cm. Cable spacing: 72 cm.





Wine-Grower Passage

Genuine wooden barrel mounted on 2 connector boards equipped with a rotation axis. Fixed on two support cables.

Dimensions

Barrel heigh: 66 cm.

Barrel length: 95 cm.

Cable spacing: 100 cm.

Possible use as a horizontal game module.











The Gallic challenge

Genuine wooden barrel mounted on 2 connector boards equipped with an rotation axis

rotation axis.

Dimension: Ø 32 cm.




Wooden box autoclave class 4, fixed on a non-slip floor. Dimensions: length 0,80 m, width 0,60 m, height 0,62 m.

This box is supplied with assembly accessories and sandow, allowing your to create and customize your game module.



Sandow Ø 9 mm 20 m. Color black.








Anchor island

Made of Okoume exterior plywood, thickness 40 mm, stained. Supplied with the assembly accessories.





Level of difficulty

Bretzel

Made of Okoume exterior plywood, thickness 40 mm, stained. Supplied with the assembly accessories.



Dimensions

Length: 0,80 m. Width: 0,54 m. Wire cable spacing: 0,40 m.

decoration.








Mushroom

Solid wood mushroom, hat \emptyset 300 mm. With mounting accessories.



Available natural or with red paint and white stains.








Bump

In atable 1/2 sphere. Color black. To fix on wire ropes, \emptyset 600 mm. Comes with assembly accessories.

Color: black.







Level of difficulty




The Bunch

Colored, engraved and varnished non-slip exterior board. Supplied with assembly accessories.

Zoo collection

Plank made of engraved and varnished non-slip exterior plywood supplied with assembly accessories. The collection is currently composed of 8 elements: the lion, the zebra, the elephant, the panda, the crocodile, the monkey, the rhino and the koala.

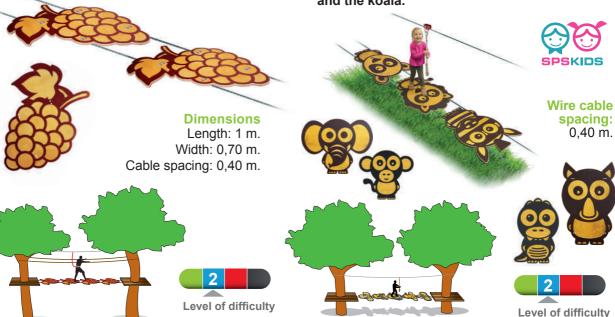




Walking eggs

Yellow, green, red, exterior non-slip plywood, engraved and stained. Thickness 15 mm. To be installed on 2 wire cables. Supplied with assembly accessories. Dimensions: 50 cm x 60 cm, thickness 15 mm.

Wire cable spacing: 30 cm. **SPSKIDS** Level of difficulty

Big eggs

Yellow, green, red, exterior non-slip plywood, engraved and stained. Thickness 15 mm. Vertical fixing on 4 wire cable. Dimensions: 180 cm x 122 cm. Path: 90 cm x 75 cm.

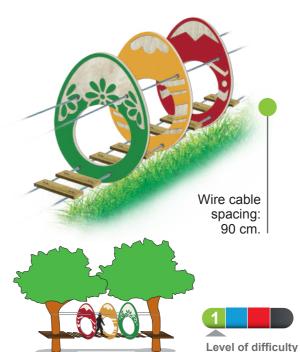




Alphabet footbridge

Customize your suspended bridge by displaying a theme, the color of your course, the name of your park, etc...

Colors yellow, red, blue or black.







SPSFILETS



Descriptif

Non-slip exterior plywood. 15 mm thick. Supplied with assembly accessories.



Level of difficulty




Lion's head

Non-slip exterior plywood in the shape of a lion's head to be fixed on 4 wire cables. Color: red.



Height 1,95 m. Width

1,70 m.



Other shapes available on request.




Pulley for rolling games

Pulley with a stainless steel shackle

(breaking point 2T400 coef cient 5). Equipped with plastic wheels to prevent premature wear of the wire rope.





On the following pages, the pulley suits to the game which is displayed on the illustrations of courses.



Pulley with a stainless



Tandem Speed Petzl

It is the fastest carriage pulley. It is specifically designed for lower-angle zipline traverses.




Tandem Speed Petzl








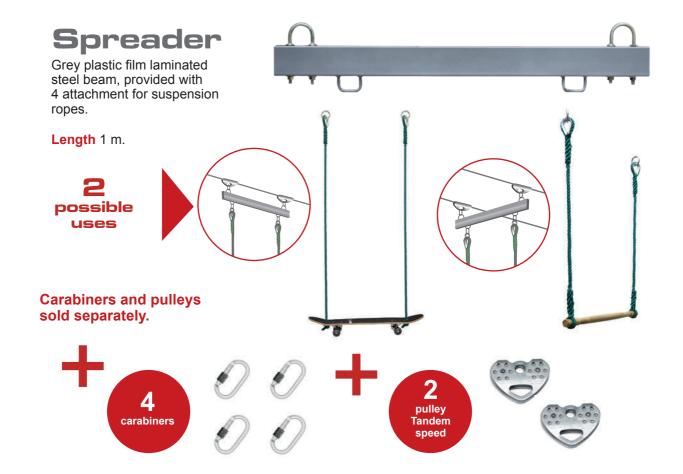

The pencil case

Brown PVC-coated foam case with top zip. Equipped with 2 suspension ropes PP Tex 20 mm, length 2,50 mm, color Havana brown.
















Rising zip-line

We offer you a new solution to reach the upper platform for an obstacle change. To move easily.

Composed by:


- 2 splices with thimble in a ring connected to a pulley by a swivel.
- Anti-slip seat board connected to 2 x Ø 100 mm logs treated autoclave class 4.
- Spreader log.
- Polypropylene ropes (similar to natural hemp) Ø 16 mm.
- Central splices.

Dimension ground 80 cm x 80 cm. Height: 1,80 m.

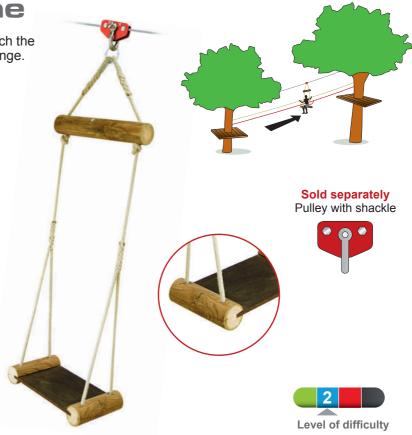

The Sphere

"Polyform" red boat fender Ø 800 mm, equipped with one suspension rope

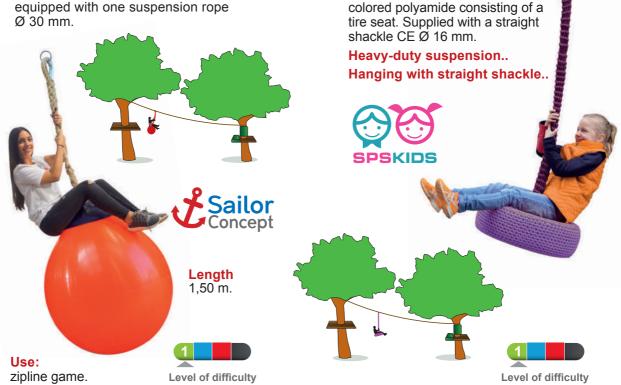

The hoop

Braided swing made of mass-





Sold separately Pulley with shackle



Dimensions


Length: 0,80 m. Width: 0,65 m.



Pirate zip

Polypropylene Monkey's fist ball Ø 300 mm, equipped with a suspension rope Ø 30 mm with thimble and suspension rings.

Total length: 2,50 m.




Sold separately

Tandem Speed Pulley Petzl





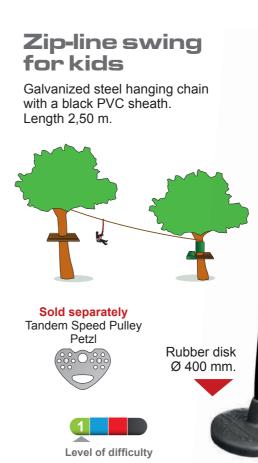

Baby Ball

Buoy (swing)

- Suspension rings and galvanized steel rings (in the shape of a 8). Adjustable polypropylene suspension rope Ø 12 mm from 75 cm to 1,50 m.
- Polypropylene parts, color black.
- Supplied with a valve.

Not in ated. Colors red.



Tandem Speed Pulley Petzl






Level of difficulty

The ball

Coconut fiber ball Ø 350 mm

- Equipped with a textured polypropylene suspension rope Ø 30 mm.
- Thimble and suspension ring at the top.

Rope length: 2,40 m.



Tandem Speed Pulley Petzl








Flying fox rope

Textured polypropylene rope Ø 30 mm.

- Rope loop 200 mm at the bottom.
- Thimble and ring suspension at the top.

Length: 1 m.



Sold separately

Tandem Speed Pulley Petzl





Handlebar

- Hot-dip galvanized.
- Equipped with 2 non-slip handles.
- Protective foam in the middle.




Spiderman zip line

- Shock-absorbing sheathed steel frame.
- Reinforced net cordage Ø 16 mm.
- Chain made of galvanized steel Ø 6 mm.
- Chain length 75 cm.
- Rope total length 117 cm.

For children and adults.



Other use Swing




Basket

Swing

- Soft ring.
- Polypropylene parts! color black.
- Suspension rings and galvanized steel rings (in the shape of a 8).
- Seated use only.







Sold separately Tandem Speed Pulley







Level of difficulty



Oval Length 1 m. Max width 0,80 m.





Trapeze

Wooden trapeze Ø 30 mm

Thimble and suspension rings at the top.

Equipped with 2 suspension ropes \varnothing 16 mm. Length 1 m.



Cable spacing 70 cm.







Surfboard

Oscillating on springs.


- 1 textured polypropylene suspension rope Ø 30 mm with thimble and ring and reinforced grip at the bottom.
- 1 non-slip board.
- 1 oscillating system.
- 4 pulleys Tandem Speed.



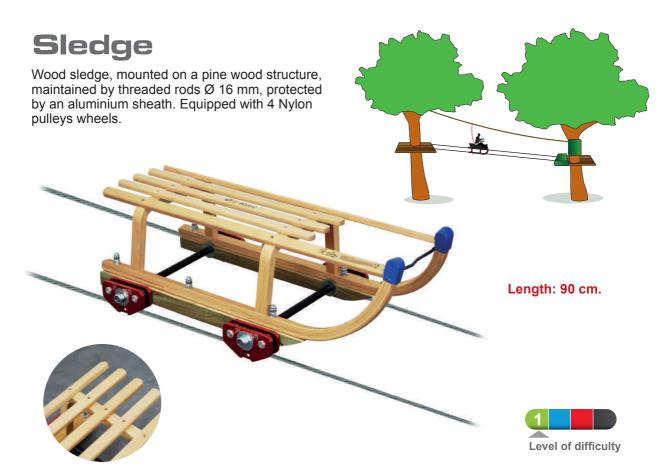

Fun Box

Manufacturing custom net cages with landings, labyrinth, partitions to move safely. Suitable for childrens and adults.











Available color
Roof





Available color
Sides and roof















Course without harness or Sea of Nets

We craft tailor-made polyamide nets, 50 mm mesh for courses without harness. Nets meet the requirements of EN 1263-01 Standard.



Available color Roof



Available color
Sides and roof
















Door to secure your Sea of Net

Access door for Funbox or course without harness allows to secures the enter of the module Made-to-measure.





Door equipped with a bolt can have a padlock to close completely the access.

Pre-stretched halyard

Pre-stretched halyard \emptyset 10 mm, made of white core polyester and polypropylene cover. For net fixing and tension.







Photo credits - Arboricordes.

Climbing holds



Nicely shaped, fine grain.





Screws 100 units Pack. 10 x 50.

Set n°1 - Climbing holds for kids

for young climbers. These holds are suitable for vertical surfaces or inclines.

Set of 22 - Color red.



Set n°2 - Climbing holds for adults

Various holds for hands and feet.
This set will enable you
to start a 7 m route.
Set of 50 - Color yellow.




Surprising and atypical forms. For competitors and beginners. **Set of 30 - Color green.**





Climbing holds for children

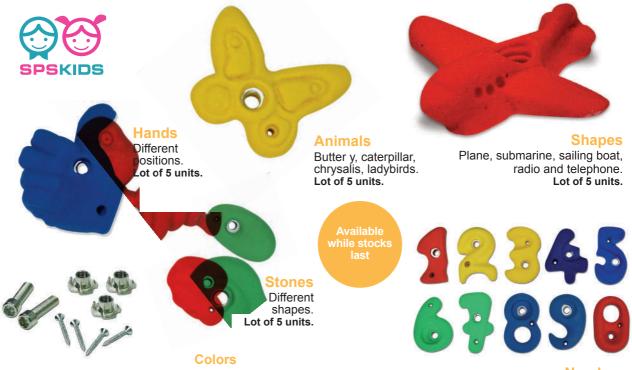

Comes with assembly tools.

blue, yellow, red, green, orange.

Numbers
Lot of 10 units.

Foam protection

Foam density 20 kg/m3 covered with a PVC tarpaulin. Colors on request: blue, orange, red or yellow.

Other dimension on request.

Preformed

Ø inside 55 cm. Height 90 cm. Thickness 10 cm.

Standard

0,90 x 0,90 x thickness 0,10 m. 1,50 x 0,90 x thickness 0,10 m.



3 adjustable straps.

Color green.



Bibs and eyelets.



Platform protection

Equiped with aps and eyelets. Dimension: 0,30 x 0,30 x 1,50 m. Thickness: 10 cm. Other length available 1 m.

Angle mattress platform protection

Foam mattress shaped for edges of platforms, thickness: 5 cm covered with a PVC tarpaulin 600 g/m2.



Dimensions

0,70 m x 0,15 m x 0,21 m.



Comfort mattress for Chimney

Foam mattress for Chimney covered with a PVC tarpaulin 600 g/m2 with bibs and eyelets.

Dimensions

Ø 800 mm x 20 cm thick.

Color green.

Colors available on demand







Mattress for zipline







Foam mattress density 20 kg/m3 covered with a PVC tarpaulin with bibs and eyelets. Dimension: 0,80 x 1,60 x 0,20 m. Thickness: 20 cm. Color green.

With or without footprints.

Jump mattress for reception

Foam mattress density 20 kg/m3 covered with a PVC tarpaulin 600 g/m2 with 8 fixing eyelets.



Unfolded dimensions: 2 m x 2 m x 0,20 m. Folded dimensions:

2 m x 1 m x 0,40 m.





Foam protection for cables

Foam covered with a PVC tarpaulin.

Color green.

Dimensions: Length 400 mm Width 310 mm.





Velcro strap fastener



Aluminium Pulley buffer

Aluminium part for wire ropes Ø 12 mm.







Absorbs energy in the event of a fall by tearing its strap, thus limits the impact suffered by the user.

ZIPSTOP

Self-regulating magnetic braking system for zip-lines.



ZIPSTOP Speed up to 24 km/h.

QUICK Flight

Magnetic induction braking technology.



QUICK Flight

This device offers an exalting experience of free fall for aerial rope courses, jump towers, fun areas etc.

TRUBLUE

The next generation of indoor and outdoor climbing wall auto belays.



TRUBLUE iQ

It covers a large range of weight: 20 to 150 kg.

ZIPSTOP SPEED

The best break for ziplines, it breaks up to the speed of 72 km/h.



QUICK Flight XL

Also available in XL size to jump from 12 m to 13 m.



TRUBLUE Speed

Its advantage is the quick retraction specific to climbing contests and trainings.



We also supply

Spirale marking

High density spiral marking for cables with 9 - 13 mm diameter.

red ■ blue







Reel: 100 m. Color black.







Abseiling rope

Diameter: 4 mm. Reel: 100 m.



Ropes

■ In reel. Color: green, beige, textured havana, white, black.



Polyamide Ø 12 mm, breaking strength 4200 daN (kg): 50 m 100 m 200 m 500 m.



DYNAPARK

Y shaped safety leadin a dynamic rope with sewn ends for acrobatic courses.



DYNACLIP

Lanyard in dynamic rope with sewn terminations for clipping anchors with an enhanced level of safety.



It is easy to slip into and is adjustable for children and for adults.



NEXUS I

purpose lanyard, Length 60 cm.

Multi-

NEXUS V V-Form

V-Form lanyard, Length 80 cm.





BAMBI

A simple and practical harness for growing climbers from age of 5 to 10 and less than 40 kg in weight.





System for securing a carabiner at the end of a rope or tape lanyard.



Sangle

Flat sling Basic 18 mm. Length: 30 cm to 1,75 m.



BEAL's equipment



Pulley SBE DÉVAL' CÂBLE

For adults and children.

- Easy to use.
- Plastic wheels
- Quiet pulley don twear the wire rope out.

Option

Magnetic system for easy use



NEWTON

Fall arrest Harness in big size. (size 1

or size 2).



at the waist facile à la ceinture.



Gloves for TreeTop **Adventure Parks**

For adults: size 8 and 10. For children: size 4 and 5. + one size for children.



TANDEM SPEED

It is the fastest moving pulley. It is specifically designed for Zip games with gentle slopes.



PANGA helmet

For adults. Sold per pack of 5 units Color: orange, blue, white.



PICCHU helmet For children. Sold per unit

Color: coral or raspberry.





PETZL's equipment

ASCENT harness

All-round adjustable harness, with a lumbar belt with an ergonomic and robust design that provides optimum support.



Kids one size XXS.

Adult XS - XL.



Carabiner KAYAK

Large carabiner, can be used as a large material holder.



Carabiner LIME-S Classic carabiner.

carabiner, compact and resistant.

FLIK harness for kids

Adjustable full-body harness, equipped with two fixed attachment points. For children weighting less than 40 kg. One size.





MOON helmet

Robust and easy-to-wear helmet, developed for collective Carabiner KAYAK use. Color green /dark. green.



CLIMBING TECHNOLOGY's equipment



CIDJAY harness

Full body harness with adjustable thighs and straps.

Kids One size.





IKKO Harness

Adjustable with straps. Available in two sizes, it is suitable for anyone looking for a harness that is simple to use and manage.



TYRO Harness

Sitting harness seat for zip line.



AGYL Lanyard for SBE pulley

19 mm flat strap to attach a SBE pulley. 25 cm / 30 cm.



Adult XS - 4XL



50 cm

75 cm

40 cm



Double AKRO Lanyard (Y)

Semi-static rope: 10,5 mm, 80-80 cm, with carabiner brake integrated.







STRATO VENT ightweight ventilated helmet.





FALCON

Lightweight seat harness, confortable and durable.











TOP

Torso harness shorts.



GRADISTEP

Bracket to help people in difficulty.



PROGRIP Torso harness shorts.







PETZL

FIXE Pulley flanges for hauling.



ľDS

Self braking descender with anti-panic function.



Haul kit enables you to rescue users in difficulty.











AXIS 11 mm

Semi-static rope with sew termination offering excellent abrasion resistance.



BUCKET 15-30-45L Freestanding canvas bag.

Evacuation equipment

Complete personal protective equipment package.



1 Snap Hook **VULCAN SCREW**



3 Snap Hook **BE ONE**



1 PRO WORK 35L Freestanding canvas bag.





1 Snap Hook **VERTIGO TWIST LOCK**



















Illustration courses

The illustrations that are composing this catalogue are for sale. They enhance your whole course. It could also be customized on demand. Available on pdf, ai, png, jpeg format.



Don't hesitate to contact us!



The Kujanak anchoring

The concept of using bolts and anchors enables an installation at a safe distance from the trunk. Thanks to this **eco-friendly method** the tree can continue to grow freely.

A bulge appears around each insert and forms a scar. This contributes to seal the wound and reinforces the tight fit of the bolt.

Conventional anchoring

Conventional fastening systems exert considerable pressure on the bark, resulting in the death of the tree's upper layers.

The consequences are disastrous: development of fungi, insects, bacteria...




The Kujanak platform

The Kujanak platform is environmentally friendly and 100 % recyclable. Ready-to-assemble delivery.

Douglas fir Structure

Out of sapwood: section 60 x 220, pre-drilled for bolts.

Ref KPF OCTO





Quick installation in four steps: assembly, positioning, drilling and assembly.



6 rafters version



6 logs version

Anchors and bolts

In kit form Ref KIT IG

Set of 4 insert anchors and bolts: nuts, washers and assembly screws for wood structure.







Per unit

Ref KIG SOLO Insert anchor and bolt per unit for cable pulling.



Drilling tools


Helicoid drill

diameter 36 x 400 for installation rings and platforms.

Ref MH36




Drilling guide Ref GPA



Kujanak anchoring ring

The Kujanak anchoring ring is designed to accommodate a multitude of equipment, such as lifelines, obstacles for treetop adventure parks, nets, zip lines and footbridges, providing a multi-purpose solution for your courses.

Ref KA



Jamb for ring

Reinforcement part for heavy loads.

Ref KJA



Different sizes		
S	Ø 25 to 42 cm	
M	Ø 36 to 57 cm	
L	Ø 50 to 71 cm	
XL	Ø 63 to 89 cm	
XXL	Ø 98 to 145 cm	

Kujanak half-ring

It is perfectly suited to the installation of your games and obstacles, sound carriers, lighting, net curtains, aviaries...







Kujanak reinforced ring


This system can support very heavy loads and be used to anchor cables, net sheets, long bridges, heavy obstacles, guy wires..


Ref KAD

Kujanak accessories

Discover Kujanak innovations that make construction and maintenance easier and faster. It means for your building crew shorter construction times. For your company: cost savings. For your customers: durable and intuitive high-performance equipment.







Krobois

Accessory for fastening wood beams to suspension cables using a simple screw gun. For treetop adventure parks, via ferrata, aerial trails.


Ref KKB


Kujanak accessories

Crossule

Accessory for attaching suspension ropes (e.g. swings) or footbridges to cables. For treetop adventure parks, via ferrata, aerial trails...

Ref KCS

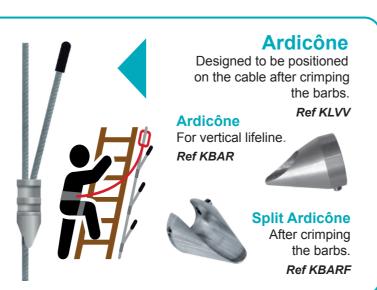



Kratos shock absorber

35 x 220 mm To secure the vertical lifeline in the event of a fall.

Ref KRATOS

Engineering office



In our engineering office, we design and develop new game modules to complement your courses.

We are also at your services to develop customized products according to your specific needs and infrastructure.

Our creativity is limited only by your imagination...



Tel. +33 (0)2 31 78 82 76 ■ contact@spsfilets.com

15 rue Ampère ■ 14120 Mondeville ■ France







